

## PRODUCT RANGE FOR 2011

**novus**<sup>®</sup>

MORE.SPACE.SYSTEM.

We solve challenges at any workplace.

NOVUS more space system – the intelligent use of space

## A strong alliance

Novus GmbH & Co. KG is part of the Erwin Müller Group that also includes Dahle Bürotechnik, emco bau, emco bad, emco klima as well as emco electroroller and employs over 1,000 members of staff world-wide.

The Erwin Müller Group Lingen is committed to the highest standards of quality, safety and environmental protection. They have developed a clear ecological program based on the international eco-management system EN ISO 14001. Modern engineering and systems management ensure environment friendly production. With few exceptions, our products are developed in-house and manufactured to EN ISO 9001 providing exceptionally high quality and long life. Distinguished by its strong cultural commitment, the Erwin Müller Group promotes young talent as well as well-known international artists.

### Head Office

Novus GmbH & Co. KG  
Postfach 18 60  
49803 Lingen

Tel. +49 (0) 591/9140-0  
Fax +49 (0) 591/9140-841  
Internet: [www.novus.de](http://www.novus.de)

e-mail: [info@novus.de](mailto:info@novus.de)

### Sales United Kingdom

Thinking Space Systems Ltd  
Unit 2, The Quadrangle  
Abbey Park Industrial Estate  
Romsey Hants SO51 9 DL

Tel. +44 (0) 1794 516633  
Fax +44 (0) 1794 516632  
Internet: [www.thinking-space.com](http://www.thinking-space.com)  
Internet: [www.novus-uk.co.uk](http://www.novus-uk.co.uk)


e-mail: [info@thinking-space.com](mailto:info@thinking-space.com)

### Sales USA

IOPC - International Office  
Products Cooperative, Inc.  
1890 South Hwy. 14  
Greer SC 29651

Tel. 001 864 848 0062  
Fax 001 864 848 4507  
Internet: [www.iopcusa.com](http://www.iopcusa.com)

e-mail: [info@iopcusa.com](mailto:info@iopcusa.com)



4-9 SAMPLE APPLICATIONS  
10-11 ERGONOMICS AND TECHNOLOGY



12-17 MORE SPACE SETS



18-35 FLAT-SCREEN HOLDERS



36-41 ORGANISATIONAL WALLS



42-43 LIGHTS



44-45 UNIVERSAL SUPPORT ARMS




46-47 TRAY SETS




48-49 TRAYS AND SHELVES



50-51 DISPLAY POCKET HOLDERS



52-53 ACCESSORIES



54-67 TECHNICAL INFORMATION

## MORE SPACE AT THE WORKPLACE –

### Intelligent solutions from the NOVUS more space system

It's not the size of a room that matters but using available space intelligently. Always good for a new surprise, the NOVUS more space system demonstrates how easy it is to optimise the use of existing space the systematic way. Its practical solutions turn the office into a convenient and comfortable place to work in – not least because of its outstanding product qualities.





**Inspiring**

Developing its products, Novus is always guided by the needs of the user.

**Clever**

Intelligent combinations are geared specifically to ensuring efficient work flows, leaving more time for the important things.

**Individual**

The NOVUS more space system comprises a wide range of modular products that can be combined in any way to suit large varieties of requirements. Customised solutions are available on request for specific needs.

**Reliable**

As the Novus range is synonymous with first-class quality and efficiency, our products come with a warranty of up to 5 years provided they are used in the intended way.





THIS IS WHERE THE NOVUS MORE SPACE  
SYSTEM CREATES MORE ROOM ...

## ... FOR A CLEAR PICTURE OF DATA.

Keeping a large quantity of data in view is extremely important onboard ship. This is why the NOVUS more space system also provides the ideal solution for cruise liners. It securely positions several monitors, giving captain and crew a clear picture of everything they need to know.

## ... FOR STABILITY.

Even in heavy swell, the NOVUS more space system remains as firm as a rock. Monitors can be securely mounted in cabins, retaining the ideal position even when the sea is rough.

## **We solve challenges at sea – and at any workplace.**

Major challenges are easily solved with the NOVUS more space system – at high sea just as they are in the office. No matter where they are used, these individual solutions free up space to maximise convenience.

### **More room to move at the workplace.**

The NOVUS more space system gives you more freedom – for your work and creativity.






### Securely mounted for working safely.

Solutions from the NOVUS more space system can be installed firmly and securely, making them the perfect choice for heavily used information media in the public domain.



### Everything in view.

The NOVUS more space system securely holds several monitors with the convenience of flexible positioning.

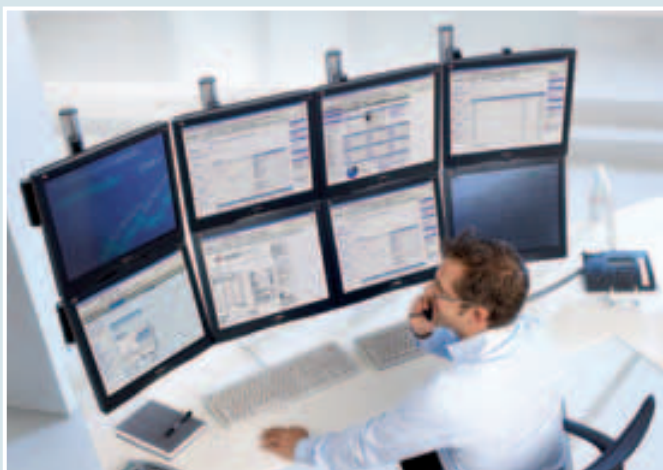





THIS IS WHERE THE NOVUS MORE SPACE  
SYSTEM CREATES MORE ROOM ...

## ... FOR ENTERTAINMENT.

In stadiums, the NOVUS more space system provides the optimum solution for configuring all manner of workplaces. Individually tailored solutions ensure the success of challenging mega-events, offering the best in entertainment.

## ... FOR SECURITY.

Particularly where there are large crowds, safety is of paramount importance. The NOVUS more space system reliably helps to watch over any event to maintain everyone's safety.

## **We solve challenges in arenas – and at any workplace.**

The NOVUS more space system makes a highlight of any major event. Just as in arenas, products that can be combined in any way provide more freedom in the office too.

### **Reaching the target as a team.**

The modern office solutions from the NOVUS more space system are a key to productive teamwork.



### Adding structure to the desk.

A clearly structured workplace makes working more enjoyable and also more efficient.



### Utilising space systematically.


The use of available space is systematically optimised to provide greater convenience and flexibility.






## For a healthy posture


Providing adjustment flexibility, products from the Novus more space system put ergonomics first. Generally good posture is the most important requirement for concentrating and working efficiently. With a modern workplace and a few rules, everyone can find the correct ergonomic position for constantly changing work postures.

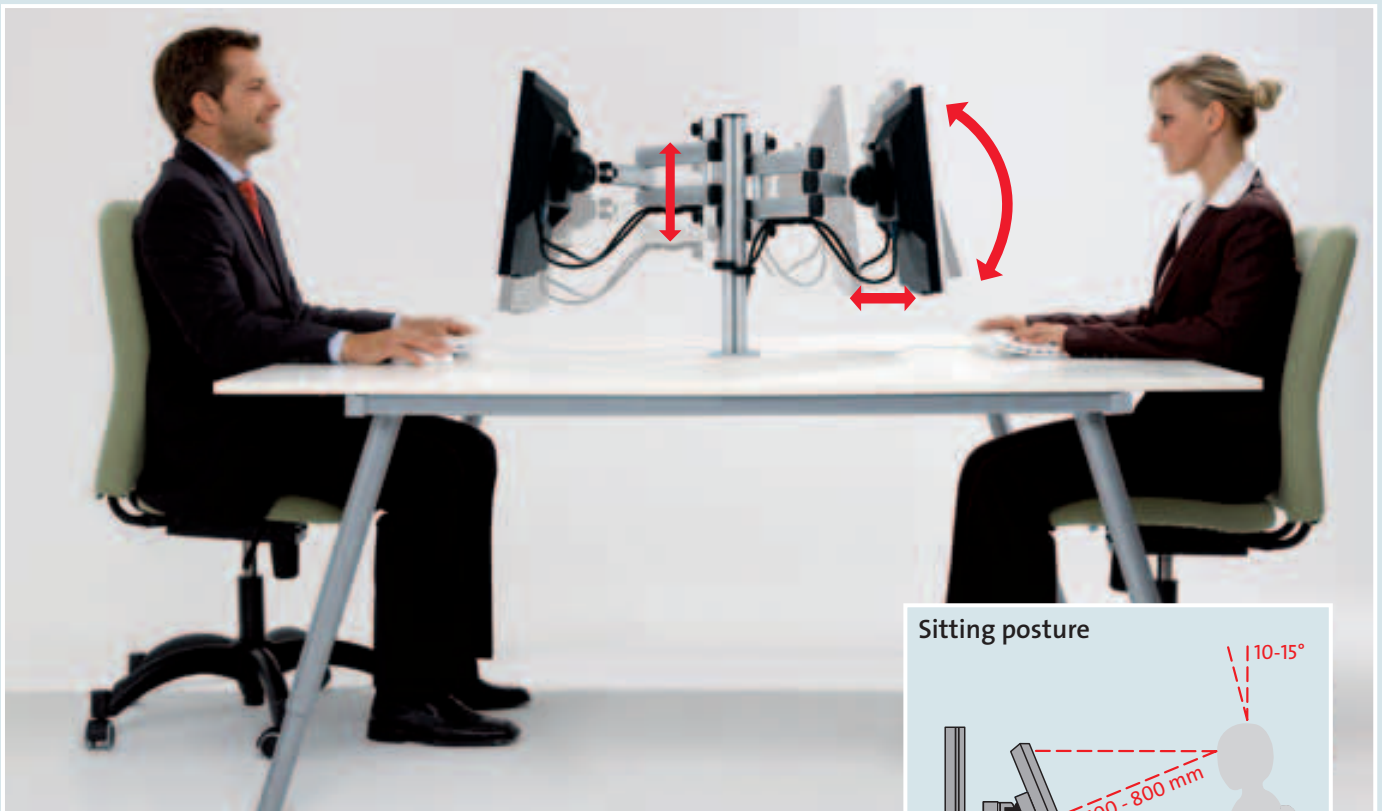

The ideal viewing distance from the monitor is between 500 and 800 mm. The top line on the screen should not be above eye level. For optimum work results, the ideal sitting position is when upper arm and forearm are at an angle of at least 90°, both feet are flat on the floor and the back rest can be felt. It is important to change your posture several times during the working day.

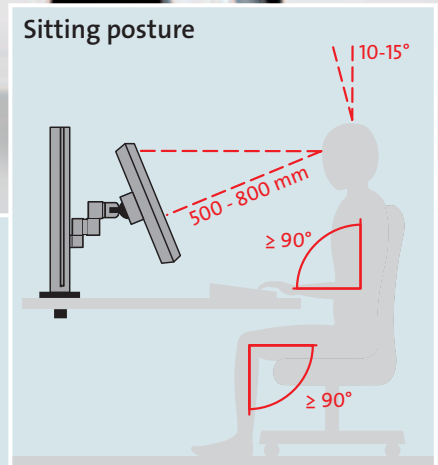


Large swivel range of Novus folding arms on the upright column.

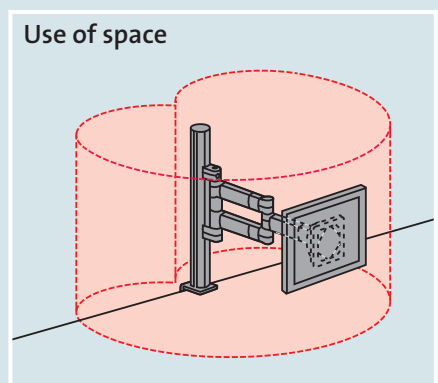




## Technical features




### 3-stage adjustment

The product can be engaged in three fixed positions.




### Dimensions of support platform

The platform dimensions are specified in millimetres.




### Action radius

The product can be swivelled through 360° and has a reach of 330 mm, for example.




### Carrying capacity

The figure shows the maximum weight (in kilograms) that can be applied to the product.




### Action radius (for supporting arms)

The product can be turned to either side and has a reach of 445 mm, for example.




### Monitor weight

This value indicates the maximum load-bearing capacity of the supporting element or the maximum weight of a monitor in kilograms.




### Height above the desk

The dimensions in millimetres indicate the minimum and maximum distance between the product and desk surface.




### Standard monitor attachment

The adapter plate allows all monitors compatible with VESA attachment standard 75 or 100 to be mounted without difficulty.




### Extendible

All items with universal clamp 1 can be fitted to the product.




### Attachment area

The value indicates the maximum area for attaching monitors.



### Infinitely adjustable

The spring balancing mechanism makes the product very easy to adjust to any position.



### Screen size


Can be used for mounting monitors of different sizes. The dimension stated is an estimated value and shows the recommended screen size in inches. Suitability is determined by monitor weight.



### Gas spring technology


The LiftTEC® arm with gas spring technology can be infinitely adjusted to any height with incredible ease.

## Attachment options






### Universal clamp 1

We supply these products as standard with universal clamp 1 designed for desktop thicknesses of 18 to 74 mm.



### Universal clamp 2


The sturdy mount for products that require more stable attachment to the desk. It provides a clamping length 16 to 76 mm.




### Base

Solid or filigree bases are available for selected products instead of the universal clamp.

## Colours



light grey



anthracite



silver | anthracite

Most products numbers end in their middle part with a 2, 5 and 9. These numbers stand for the particular product colours.

## Always the perfect combination

Different demands are made on the way every workplace is configured. To provide the optimum solution in meeting the various requirements, individual products from the more space system can be combined exactly as required.

Available directly as all-inclusive solutions, the NOVUS more space sets show exactly what a clever combination of different components can look like. Whether ergonomically structured or professionally organised down to the very last detail: No matter what the need, there's the right answer among the different 20 sets.

### Compact individuality in the smallest of spaces.

The various mounts for Novus products are just as compatible with each other as the products themselves are. Simply slotted together they produce a large number of combination options for a personally tailored workplace. This system's modularity is unique.



Remove product from universal clamp 1.



Remove the plastic sleeve fitted to the mounting pin.



Fit more space system product.

## NOVUS Business Board

Art. No.: 220 + 0140 + 000



Systematic organisation— the classic solution for storage and telephone.

Comprising:

- > BoardMaster 100 (page 48)
- > TalkMaster (page 44)
- > CopySwinger III (page 47)

BoardMaster length: 1000 mm, compartment depth 195 mm

BoardMaster attachment: Universal clamp 1, clamping length 18-74 mm

Carrying capacity TalkMaster: Telephone weight 2 kg

Action radius: TalkMaster 700 mm

## NOVUS Business Rail

Art. No.: 220 + 0040 + 000



The talented organiser for the desktop.

Comprising:

- > Railing 100 (page 37)
- > CopySwinger III (page 47)
- > TalkMaster (page 44)
- > Pura Line multi-purpose box, small (page 39)
- > Pura Line pencil cup (page 39)
- > Pura Line CD rack (page 39)

Railing length: 1000 mm

Railing attachment: Universal clamp 1, clamping length 18-74 mm

Carrying capacity TalkMaster: Telephone weight 2 kg

Action radius: TalkMaster 700 mm

## NOVUS DSS Basic

Art. No.: 220 + 0010 + 000



Attractively priced set as the gateway to ergonomically correct use of flat screens at the workplace.

Comprising:

- > DSS column 445 system clamp 1 (page 25)
- > DSS folding arm (page 26)

Column length: 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 5 kg; infinitely variable height

Action radius: 398 mm

## NOVUS TSS Basic

Art. No.: 220 + 0050 + 000



The best-selling Novus combination for the ergonomically correct use of flat screens at the workplace.

Comprising:

- > TSS column 445 system clamp 1 (page 28)
- > TSS folding arm III (page 31)

Column length: 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 15 kg; infinitely variable height

Action radius: 505 mm

### NOVUS TSS Basic & Light

Art. No.: 220+0090+000



**Unique:** The combination of flat-screen support and workstation light.

Comprising:

- > TSS column 445 system clamp 1 (page 28)
- > TSS folding arm II (page 31)
- > OfficeLight PRO II (page 43)

Column length: 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight 10 kg; infinitely variable height

Action radius: TSS folding arm II 450 mm / OfficeLight PRO II 980 mm

Light: electric ballast, 18 Watt TC-L

### NOVUS Business Combination

Art. No.: 220+0070+000



**Ideal addition to the notebook workstation.**

Comprising:

- > TSS column 445 system clamp 1 (page 28)
- > TSS folding arm III (page 31)
- > TSS/DSS notebook holder (page 32)

Column length: 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight 15 kg / notebook weight 5 kg;  
infinitely variable height

Action radius: TSS folding arm III 505 mm / TSS/DSS notebook holder 523 mm

### NOVUS TSS Duo

Art. No.: 220+0060+000



**Twin screen solution with the NOVUS Tetra Support System.**

Comprising:

- > TSS column 445 system clamp 1 (page 28)
- > 2 x TSS folding arm III (page 31)

Column length: 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 2 x 10 kg; infinitely variable height

Action radius: 505 mm

### NOVUS Comfort Duo

Art. No.: 220+0150+000



**NOVUS LiftTEC® – the innovative support arm concept for enhanced ergonomics and convenience.**

Comprising:

- > TSS column 445 drilling screw fitting (page 28)
- > 2 x TSS-LiftTEC® arm II (page 34)

Column length: 445 mm

Column attachment: Drilling screw fitting, screw with M10 thread,  
desktop thickness 5-55 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 2 x 3-8 kg; infinitely variable height

Action radius: 547 mm

## NOVUS Office Professional

Art. No.: 220+0030+000



„All-rounder“ package for two-screen workstations.

Comprising:

- > 2 x TSS column 445 system clamp 1 (page 28)
- > 2 x SlatWall element 100 (page 37)
- > OfficeLight PRO II (page 43)
- > TSS column adapter (page 35)
- > SlatWall-LM arm 0-0-1 (page 38)
- > TSS folding arm III (page 31)
- > Pura Line tray B4 (page 39)

Size SlatWall over the desk: 1000 x 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight SlatWall-LM arm 0-0-1 7.5 kg /  
TSS folding arm III 15 kg

Action radius: TSS folding arm III 505 mm / OfficeLight PRO II 980 mm

Light: electric ballast, 18 Watt TC-L

## NOVUS TSS Trio

Art. No.: 220+0180+000



Three flat screens for much better productivity.

Comprising:

- > TSS column 445 cable port attachment (page 28)
- > 2 x TSS folding arm III XL
- > TSS support carriage (page 31)

Column length: 445 mm

Column attachment: Cable port attachment, desktop thickness 5-55 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight TSS folding arm III XL 2 x 6.8 kg /  
TSS support carriage 12 kg; infinitely variable height

Action radius: TSS folding arm III XL 651 mm

## NOVUS Control Center

Art. No.: 220+0130+000



Everything in view – the monitor bridge from the NOVUS Tetra Support System.

Comprising:

- > 2 x TSS column 445 system clamp 1 (page 28)
- > SlatWall element 120 (page 37)
- > 2 x TSS folding arm III (page 31)
- > 2 x SlatWall-LM arm 0-0-1 (page 38)

Size SlatWall over the desk: 1200 x 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight TSS folding arm III 2 x 10 kg /  
SlatWall-LM arm 0-0-1 2 x 7.5 kg

Action radius: TSS folding arm III 505 mm

## NOVUS TSS Quattro

Art. No.: 220+0080+000



Four flat screens – not a problem for the NOVUS Tetra Support System.

Comprising:

- > TSS column 845 cable port attachment (page 28)
- > 4 x TSS folding arm III (page 31)

Column length: 845 mm

Column attachment: Cable port attachment, desktop thickness 5-55 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: Monitor weight 4 x 15 kg; infinitely variable height

Action radius: 505 mm



## NOVUS TSS XL

Art. No.: 220 + 0110 + 000



The perfect solution for large screens.

Comprising:

- > TSS column 545 cable port attachment (page 28)
- > TSS support carriage 32 (page 32)

Column length: 545 mm

Column attachment: Cable port attachment, desktop thickness 5-55 mm

Monitor attachment: with standard 100 x 100 mm or  
200 x 100 mm mounts

Carrying capacity: monitor weight 20 kg; infinitely variable height

## NOVUS Office Plus

Art. No.: 220 + 0020 + 000



The elegant combination of screen support, storage compartments and optimum desk lighting.

Comprising:

- > TSS column 445 system clamp 1 (page 28)
- > TSS folding arm II (page 31)
- > BoardMaster 100 (page 48)
- > OfficeLight PRO II (page 43)

Column length: 445 mm

BoardMaster length: 1000 mm / compartment depth 195 mm

Column attachment: System clamp 1, clamping length 14-40 mm

BoardMaster attachment: Universal clamp 1, clamping length 18-74 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 10 kg; infinitely variable height

Action radius: TSS folding arm II 450 mm / OfficeLight PRO II 980 mm

Light: electric ballast, 18 Watt TC-L

## NOVUS Business & Light

Art. No.: 220 + 0170 + 000



All-round package for desk organisation, lighting and flat screen.

Comprising:

- > 2 x TSS column 445 system clamp 1 (page 28)
- > OfficeLight PRO II (page 43)
- > SlatWall element 100 (page 37)
- > TSS column adapter (page 35)
- > TSS folding arm III (page 31)
- > Pura Line pencil cup (page 39)
- > Pura Line tray B4 (page 39)

Size SlatWall over the desk: 1000 x 445 mm

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 15 kg; infinitely variable height

Action radius: TSS folding arm III 505 mm / OfficeLight PRO II 980 mm

Light: electric ballast, 18 Watt TC-L

## NOVUS Office Max

Art. No.: 220 + 0160 + 000



It doesn't get better than this – the NOVUS SlatWall as an organisation wall for the modern workstation.

Comprising:

- > SlatWall 100 (page 37)
- > SlatWall-LiftTEC® arm I (page 38)
- > 2 x Perfora Line document tray B4 (page 40)
- > Perfora Line pencil cup (page 40)

Size SlatWall over the desk: 1000 x 445 mm

SlatWall attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 3-8 kg; gas spring system for adjustable height

Action radius: 400 mm

## NOVUS Visio Professional

Art. No.: 220+0200+000



High-quality set for professional desk organisation with the NOVUS SlatWall-Visio.

Comprising:

- > 2 x TSS column 445 system clamp 2 (page 28)
- > SlatWall-Visio element 100 (page 37)
- > TSS folding arm III (page 31)
- > TSS column adapter (page 35)
- > OfficeLight PRO II (page 43)
- > Perfora Line document trays B4 (page 40)
- > Perfora Line pencil cup (page 40)
- > Perfora Line CD rack for 10 CDs (page 40)

Size SlatWall-Visio over the desk: 1000 x 445 mm

SlatWall-Visio with Camira fabric cover

Column attachment: System clamp 2, clamping length 5-70 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 15 kg; infinitely variable height

Action radius: TSS folding arm III 505 mm / OfficeLight PRO II 980 mm

Light: electric ballast, 18 Watt TC-L

## NOVUS Visio Comfort

Art. No.: 220 + 0190 + 000



Practical set for customised workplace organisation with the NOVUS SlatWall-Visio.

Comprising:

- > 2 x TSS column 445 system clamp 1 (page 28)
- > SlatWall-Visio element 100 (page 37)
- > SlatWall-LiftTEC® arm I (page 38)
- > Pura Line pencil cup (page 39)
- > Pura Line tray B4 (page 39)
- > Pura Line CD rack (page 39)

Size SlatWall-Visio over the desk: 1000 x 445 mm

SlatWall-Visio with Camira fabric cover

Column attachment: System clamp 1, clamping length 14-40 mm

Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 3-8 kg; gas spring system for adjustable height

Action radius: 400 mm

## NOVUS TSS Wall Station

Art. No.: 220 + 0100 + 000



Special applications demand special solutions – the NOVUS Tetra Support System for the wall.

Comprising:

- > TSS 890 wall rail (page 29)
- > TSS support carriage (page 31)
- > TSS/DSS keyboard holder (page 32)

Wall rail length: 890 mm


Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 15 kg; infinitely variable height

Action radius: TSS support carriage 105 mm / TSS/DSS keyboard holder 472 mm

## NOVUS Office Wall

Art. No.: 220 + 0120 + 000

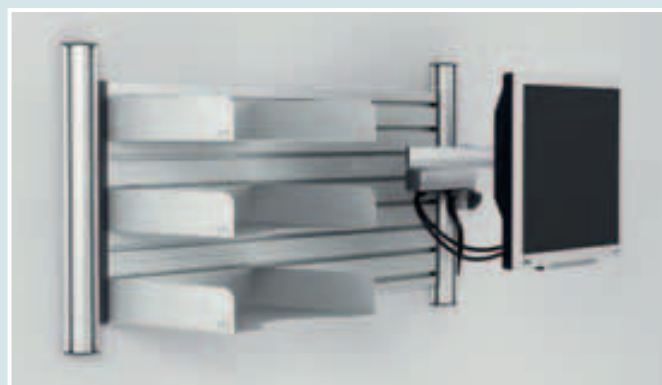

Practical wall solution for flat screen and storage.

Comprising:

- > 2 x TSS 445 wall rail (page 29)
- > 4 x SlatWall element 100 (page 37)
- > TSS folding arm II (page 31)
- > 3 x Pura Line tray B4 (page 39)

SlatWall size: 1000 x 445 mm


Monitor attachment: with standard 75/100 mm mount

Carrying capacity: monitor weight 10 kg; infinitely variable height

Action radius: 450 mm

## More freedom of movement: LM and LiftTEC® support arms

LM and LiftTEC® aluminium monitor support arms from Novus conveniently and securely support monitors weighing 3-15 kg and move them without major effort. Gas-spring system and ball-joint permit optimum adjustment of screen tilt. Quickly and extremely conveniently, the monitor can always be adjusted to the position best suited to individual needs.

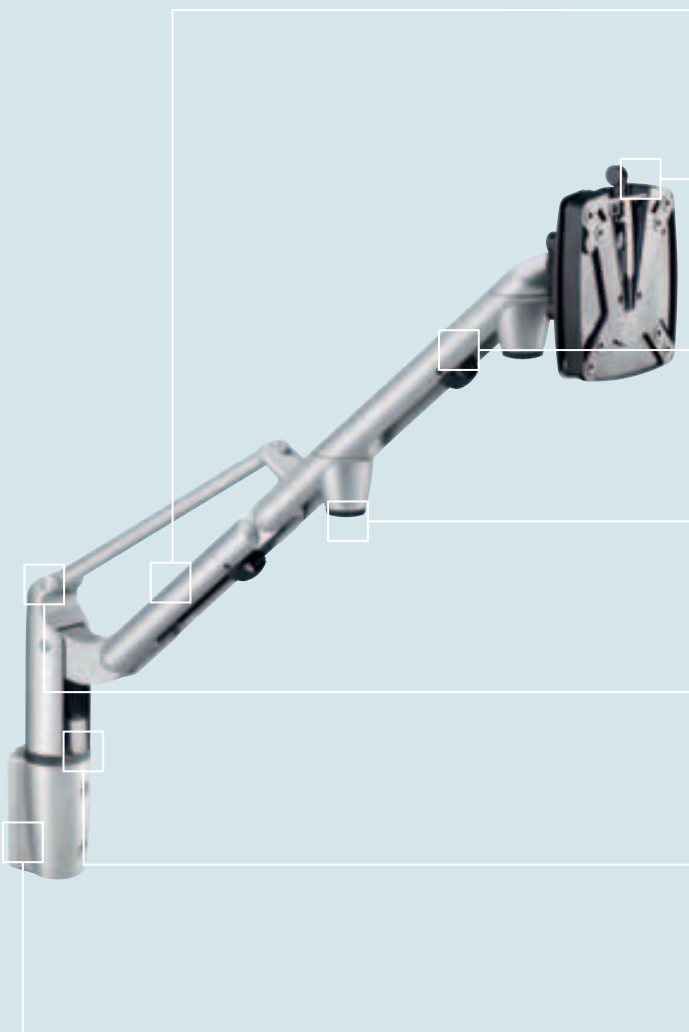

The LiftTEC® arm with convenient gas spring technology can be infinitely adjusted to any height with incredible ease.

Monitor is easy to attach using QuickRelease with single-lever operation. Ball-joint for selecting the optimum viewing angle as well as for utilising the monitor pivoting function.

Cable clips for perfect cable management along and inside the support arm.

The easy-action rotating joints can be adjusted to any position.


Adjustable gas springs allow the LiftTEC® arm to be adjusted to the weight of the monitor.

The rotating joint above the mount swivels the monitor to any position above the desk.

Attachment flexibility to suit any application: Can be attached to desk, wall, TSS column or SlatWall.



The LiftTEC® arms can be directly attached to the desk using the clamp provided and by means of cable port or drilling screw attachment.




## Secure hold, handling convenience

Monitors have been part of the standard office line-up for a long time. The high-quality monitor holders from Novus provide a secure and also a convenient mounting capability for modern screens. They allow the monitor to be re-positioned easily and quickly after changing posture, helping to ensure the most ergonomic viewing angle.



### NOVUS LiftTEC® arm I

High-quality, 1-part monitor support arm. With standard 75/100 monitor mount with QuickRelease. Reach: 365 mm. Comes complete with the LiftTEC® desktop mounting options of clamp, cable-port and drilling-screw attachment. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. No.:


3-8 kg: 930+1089+000

7-15 kg: 930+1159+000



### NOVUS LiftTEC® arm II

High-quality, 2-part monitor support arm. With standard 75/100 monitor mount with QuickRelease. Reach: 515 mm. Comes complete with the LiftTEC® desktop mounting options of clamp, cable-port and drilling-screw attachment. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. No.:


3-8 kg: 930+2089+000

7-15 kg: 930+2159+000



### NOVUS LiftTEC® arm III

High-quality, 2-part monitor support arm with straight front arm section. Standard 75/100 monitor mount with QuickRelease. Reach: 515 mm. Comes complete with the LiftTEC® desktop mounting options of clamp, cable-port and drilling-screw attachment. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. No.:

3-8 kg: 930+3089+000


7-15 kg: 930+3159+000

## FLAT SCREEN HOLDERS WITH DESKTOP/ WALL MOUNT



### NOVUS LiftTEC® arm I Dual

Practical double monitor support arm for mounting two monitors side by side or one above the other. Standard 75/100 monitor mount with QuickRelease. Reach: 415 mm. Comes complete with the desktop mounting options of clamp, cable-port and drilling-screw attachment. Adjustable gas spring for infinitely adjusting monitors of various weights.




Art. No.:

**930+1279+000**




### NOVUS JetMaster I

1-part aluminium arm with plastic joint and standard 75/100 monitor mount. For positioning the monitor flat against the folding arm with 90° ball-joint. Spring balancing mechanism for infinitely adjusting different monitor weights. Cable routing at joint.




Art. No.:

2.5-5 kg:	922+	3172	<b>3175</b>	3179
5-7.5 kg:	922+	1172	<b>1175</b>	1179

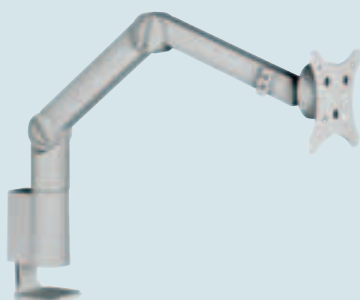

### NOVUS JetMaster II

2-part aluminium arm with plastic joint and standard 75/100 monitor mount. Spring balancing mechanism for infinitely adjusting different monitor weights. Cable routing at joints.



Art. No.:

920+ **2172** **2175** **2179**




### NOVUS JetMaster wall mount

For wall-mounting flat screens, depending on the nature of the wall. Fixed in position, the monitor can be tilted and turned at the ball-joint. With standard 75/100 monitor mount and QuickRelease function.



Art. No.:

920+ **0172** **0175** +000

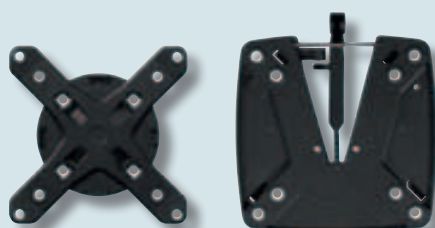

### NOVUS QuickMount

For mounting flat screens particularly close to the wall, with a carrying capacity of up to 25 kg, depending on the nature of the wall. The wall mount fits the widely used 75/100 mounting standard. Effortless monitor mounting is ensured by the QuickRelease with single-lever operation.



Art. No.:

**931+0255+000**



All products carry the GS label of tested safety apart from the JetMaster wall mount.





### NOVUS LM arm 0-0-1 WH

High-quality screen support carriage for wall-mounting flat screens weighing up to 8 kg, depending on the nature of the wall. Standard 75/100 monitor mount with QuickRelease. Reach: 125 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces.



Art. No.: 931+0089+000



### NOVUS LM arm 0-2-1 WH

1-part monitor support arm for wall-mounting flat screens weighing up to 8 kg, depending on the nature of the wall. Standard 75/100 monitor mount with QuickRelease. Reach: 275 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces.




Art. No.: 931+4089+000



### NOVUS LiftTEC® arm I WH

High-quality, 1-part monitor arm for wall-mounting flat screens weighing up to 8 kg, depending on the nature of the wall. Standard 75/100 monitor mount with QuickRelease. Reach: 400 mm. Adjustable gas spring for infinitely adjusting monitors of various weights.




Art. No.: 931+1089+000



### NOVUS LiftTEC® arm II WH

High-quality, 2-part monitor arm for wall-mounting flat screens weighing up to 8 kg, depending on the nature of the wall. Standard 75/100 monitor mount with QuickRelease. Reach: 550 mm. Adjustable gas spring for infinitely adjusting monitors of various weights.




Art. No.: 931+2089+000



### NOVUS LiftTEC® arm III WH


High-quality, 2-part monitor support arm with straight front section for optimum screen positioning. Wall-mounting flat screens weighing up to 8 kg, depending on the nature of the wall. QuickRelease as standard 75/100 monitor mount. Reach: 550 mm. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. No.: 931+3089+000

## Greater convenience using modern technology

Whether at home or in the office, whether on the wall, floor or ceiling: The Screen and BeamMasters from Novus are the ideal solution for mounting flat screens and projectors quickly and with effortless ease. High-quality materials and practical functions provide added safety and convenience using sensitive electrical equipment. Flat screens can be securely mounted on walls and ceilings of the appropriate type.

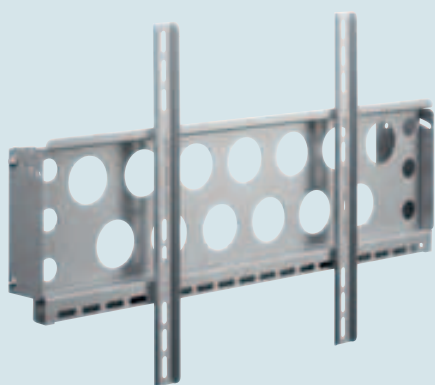

### NOVUS ScreenMaster Vario 50 WH

Versatile wall mount with a tilting angle of 0° to 15° for flat screens in sizes of approx. 32" - 50" and weighing up to 60 kg. The ScreenMaster Vario features detachment guard and anti-theft function for added safety and security. Max. mounting range of 700 x 460 mm; accommodates standard 200 x 100, 200 x 200, 300 x 300, 400 x 200, 400 x 400, 600 x 200 and 600 x 400 mounting hole patterns.



Art. no.:

943+0509+000



### NOVUS ScreenMaster Vario 50 D

Practical ceiling mount, including universal adapter for flat screens of up to 50" weighing no more than 60 kg. With telescopic extension for adjusting height from 900 to 1600 mm, includes detachment guard, interior cable management as well as 360° turning function and a tilt angle of -5° to +30°. Max. mounting range of 700 x 460 mm; accommodates standard 75 x 75, 100 x 100, 200 x 100, 200 x 200, 300 x 300, 400 x 200, 400 x 400, 600 x 200 and 600 x 400 mounting hole patterns.



Art. no.:

944+0509+000



All products carry the GS label of tested safety.



### NOVUS ScreenMaster Vario 50 S

All-purpose stand for flat screens in sizes of approx. 32" - 50" and weighing up to 60kg. Flat screens can be turned through 20° to either side. Featuring detachment guard and internal cable management for a neater look. Max. mounting range of 700 x 460 mm; accommodates standard 200 x 100, 200 x 200, 300 x 300, 400 x 200, 400 x 400, 600 x 200 and 600 x 400 mounting hole patterns.



Art. no.:

945+0509+000



### NOVUS ScreenMaster Vario 50 S Plus

High-quality stand, including two shelves for more storage space. Both shelves are made of satin-finished ESG safety glass, each shelf supports loads of 15 kg. This stand can be used for mounting 32" - 50" flat screens weighing up to 60kg with detachment guard. For better viewing, the flat screen can be turned through 20° to either side. Includes internal cable management. Max. mounting range of 700 x 460 mm; accommodates standard 200 x 100, 200 x 200, 300 x 300, 400 x 200, 400 x 400, 600 x 200 and 600 x 400 mounting hole patterns.



Art. no.:

945+2509+000



### NOVUS BeamMaster I

High-quality ceiling mount for projectors, including gas-spring ball-joint and universal attachment. Tilts through 25° and turns through 360° for adjusting the viewing angle to suit any situation. Includes toolless single-hand adjustment system for easy mounting.



Art. no.:

740+1009+000



### NOVUS telescopic ceiling extension


For infinitely variable height adjustment of BeamMaster I from 400 to 700 mm. Includes internal cable management.

Art. no.:

796+0709+000


## Integrated harmony: NOVUS Duo Support System

With its smart, elegant design, the NOVUS Duo Support System fits into any workplace to give a look of harmony. The tried and proven system guarantees an ingeniously simple and secure solution for mounting flat screens. The DSS columns can be combined with the various DSS supporting elements for added flexibility.

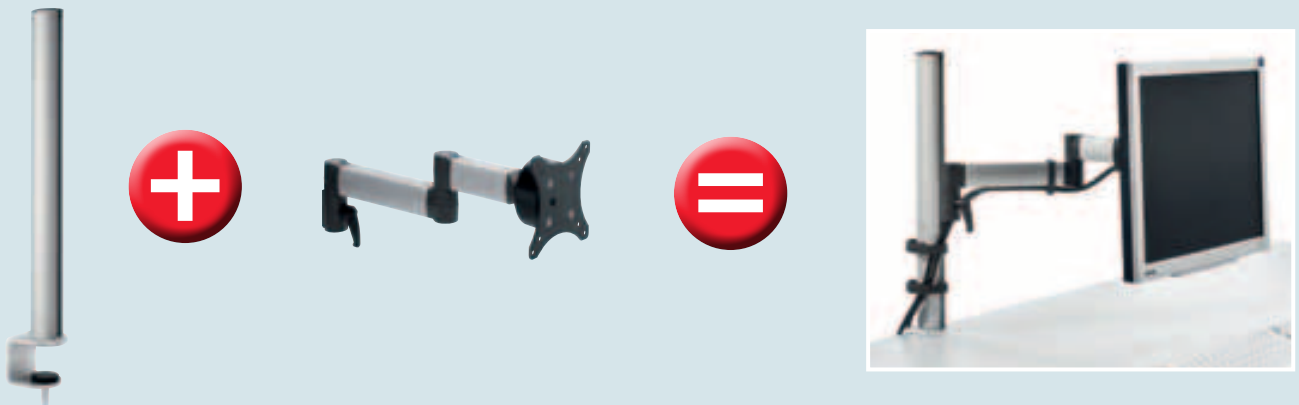

### NOVUS DSS column

The DSS column provides a stable base for any modern computer workstation. It reliably holds DSS supporting elements, offering the convenience of working with two screens.

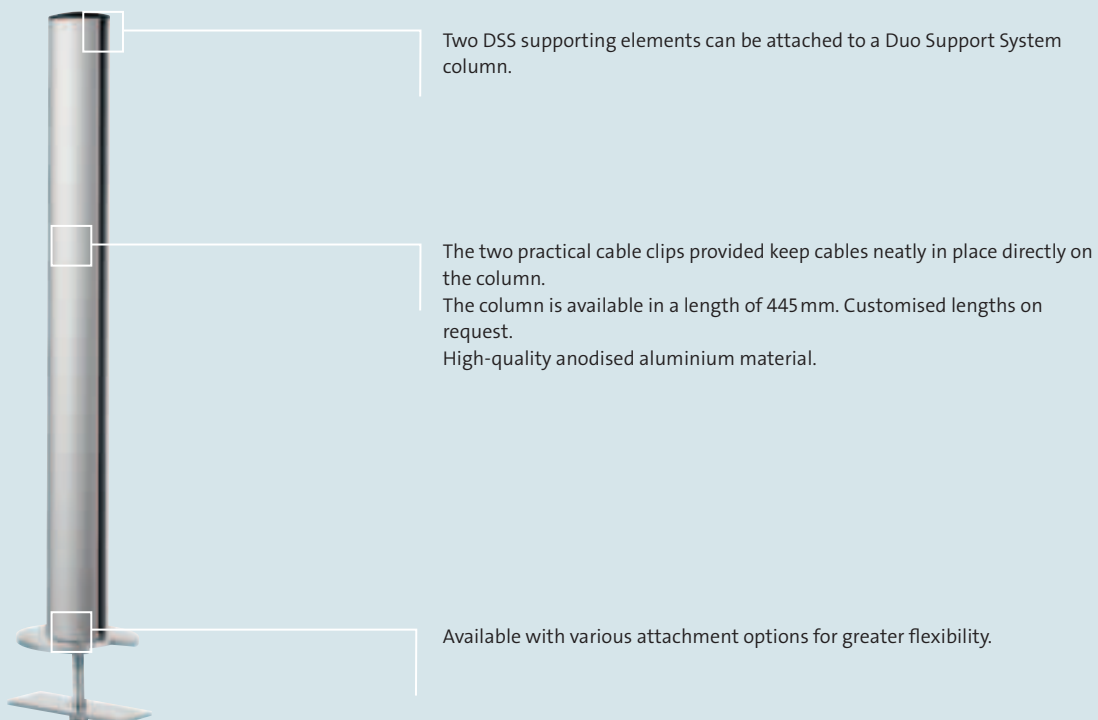



### NOVUS DSS column with system clamp 1 (14-40 mm)

445 mm aluminium column with system clamp 1 (14-40 mm) and two cable clips. With a clamping length of 14-40 mm.

Art. no.: 961+1609+000



### NOVUS DSS column with system clamp 1 (13-25 mm)

445 mm aluminium column with system clamp 1 (13-25 mm), ideal for attaching to sliding panels. Includes two cable clips. With a clamping length of 13-25 mm.

Art. no.: 961+1709+000



### NOVUS DSS column with system clamp 2

445 mm aluminium column with system clamp 2. Includes two cable clips. With a clamping length of 5-70 mm.

Art. no.: 961+1209+000



### NOVUS DSS column with drilling screw fitting

445 mm aluminium column with drilling screw fitting and two cable clips. For a desktop thickness of 5-55 mm.

Art. no.: 961+1109+000



### NOVUS DSS column with cable port attachment

445 mm aluminium column with cable port attachment and two cable clips. For a desktop thickness of 5-55 mm.

Art. no.: 961+1409+000



### NOVUS DSS column with pin adapter

445 mm aluminium column with pin adapter and two cable clips. Push-in stud in a diameter of 16 mm for use in various desk adapters from the office furniture industry.

Art. no.: 961+1509+000



### NOVUS DSS column with system rail mount



445 mm aluminium column with system rail mount for use in various system rails from the office furniture industry. Includes two cable clips.

Art. no.: 961+1309+000



## NOVUS DSS folding arm

Working at a desk demands good freedom of movement. The NOVUS DSS folding arm gives you more space at any computer workstation.

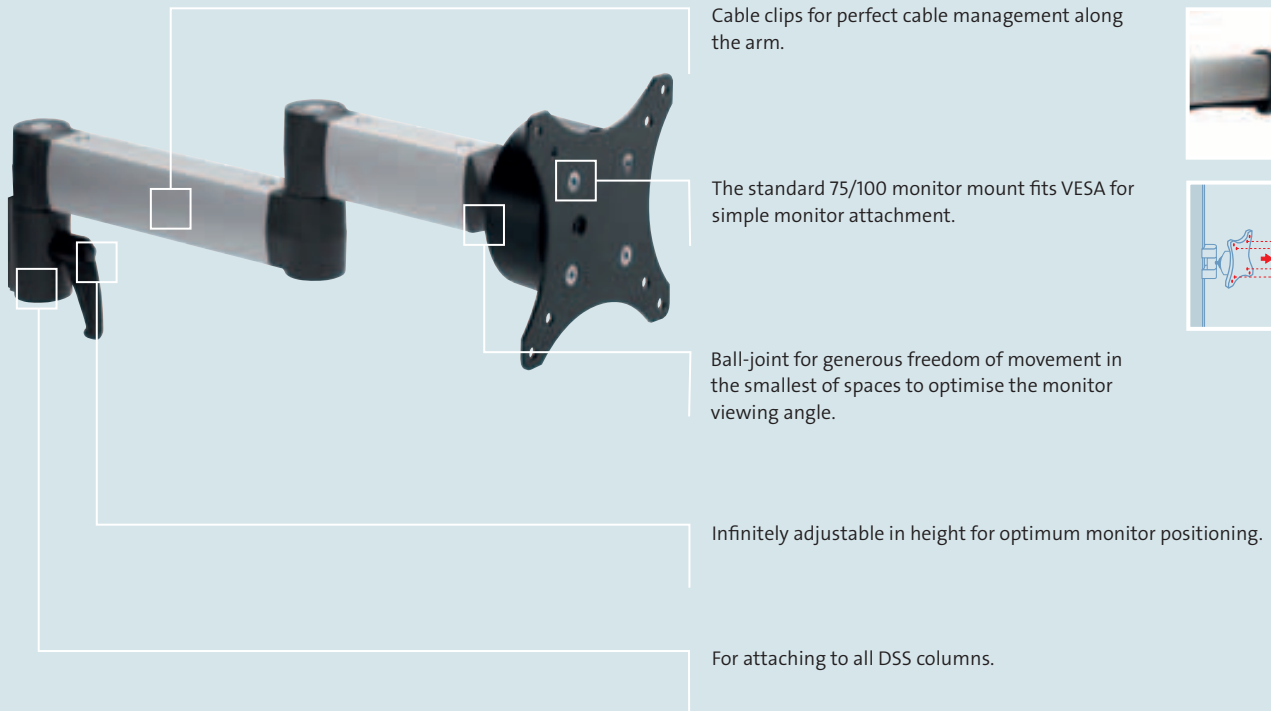

### NOVUS DSS support carriage

High-quality support carriage, infinitely adjustable in height, with standard 75/100 monitor mount. Tilts and turns for freedom of movement in the smallest of spaces. For monitors weighing up to 7.5 kg. Reach: 58 mm



Art. no.: 963+1019+000



### NOVUS DSS folding arm

High-quality support arm infinitely adjustable in height, with standard 75/100 monitor mount. Lightweight monitors weighing no more than 5 kg can be infinitely adjusted in any direction. Comes complete with drop guard and two cable clips. Reach: 398 mm.




Art. no.: 964+1019+000



The NOVUS DSS folding arm carries the GS label of tested safety.


## Greater flexibility: NOVUS Tetra Support System

The Tetra Support System gives flexibility a whole new meaning as it provides a wide range of combination options. Up to eight screens can be mounted on one column in the office, in production as well as in unusual places, such as onboard ship. A product range catering to the customer's specific needs.

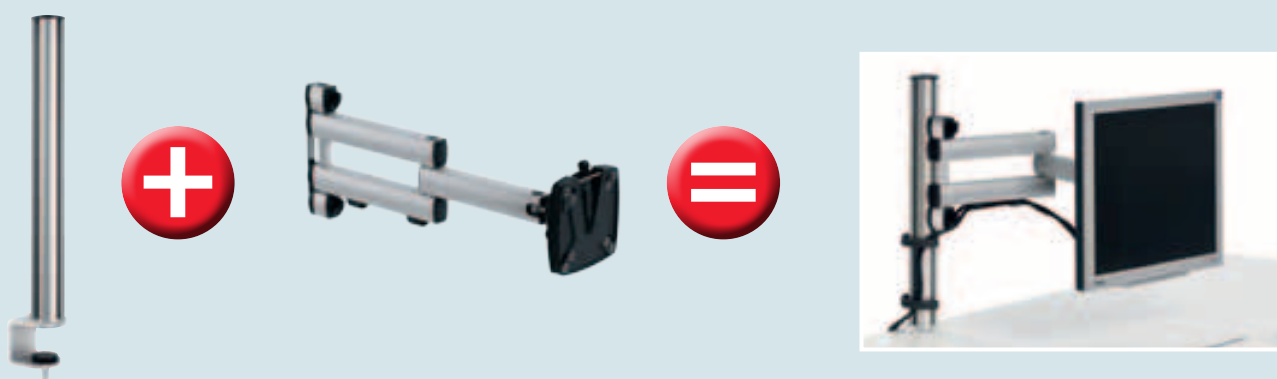

### NOVUS TSS column

The TSS column securely holds a large number of TSS monitor supporting elements. Depending on the mounting option selected, up to eight flat-screen supporting elements can be attached to the sturdy aluminium column.

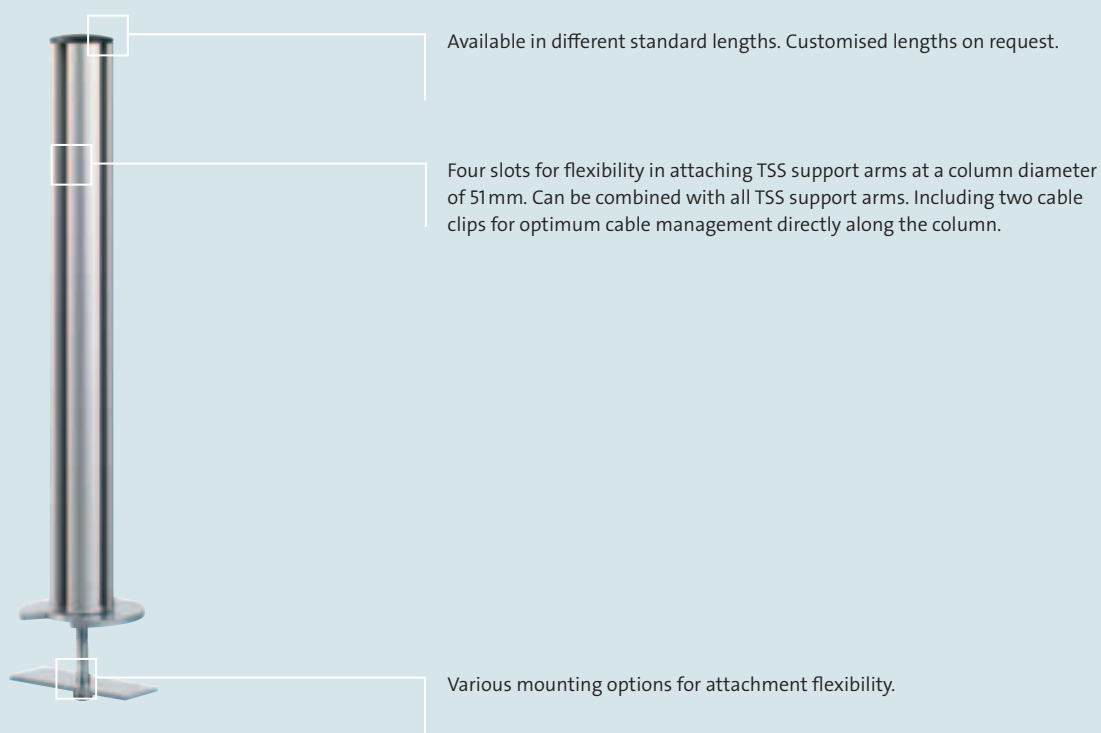



## NOVUS TSS column with system clamp 1 (14-40 mm)

Clamping length from 14-40 mm; in lengths of 445 and 545 mm; includes two cable clips.



Art. no.:

445 mm: 961+0609+000

545 mm: 961+0639+000



## NOVUS TSS column with system clamp 1 (13-25 mm)

Clamping length from 13-25 mm; 445 mm column length, ideal for mounting sliding panels. Includes two cable clips.



Art. no.:

445 mm: 961+2709+000



## NOVUS TSS column with system clamp 2

Clamping length from 5-70 mm; in lengths of 445 and 545 mm; includes two cable clips.



Art. no.:

445 mm: 961+0209+000

545 mm: 961+0239+000



## NOVUS TSS column with base

Column with solid base weighing 4 kg and rubber pads to protect the desk surface; in a length of 445 mm; includes two cable clips. Designed for one TSS support carriage.



Art. no.:

445 mm: 961+0309+000



## NOVUS TSS column with drilling screw fitting

For desk tops in a thickness of 5-55 mm; in the three lengths of 445, 545 and 845 mm; includes two cable clips.




Art. no.:

445 mm: 961+0109+000

545 mm: 961+0139+000

845 mm: 961+0119+000



## NOVUS TSS column with cable port attachment

For desk tops in a thickness of 5-55 mm; in the three lengths of 445, 545 and 845 mm; includes two cable clips.



Art. no.:

445 mm: 961+0409+000

545 mm: 961+0439+000

845 mm: 961+0419+000



### NOVUS TSS column with pin adapter

445 mm column for pushing into various adapters from the office furniture industry. Includes two cable clips.



Art. no.:

445 mm: 961+2509+000



### NOVUS TSS column with system rail attachment

445 mm column for fitting into many of the system rails used by the office furniture industry. Includes two cable clips.



Art. no.:

445 mm: 961+2309+000



### NOVUS TSS column with ceiling mount

For mounting to the ceiling or floor, depends on type of ceiling or floor; in a length of 845 mm; includes two cable clips.



Art. no.:

845 mm: 961+0819+000



### NOVUS TSS wall rail

Support rail for wall mounting, depends on the type of wall; in lengths of 445 and 890 mm, with a width of 51 mm and depth of 38.5 mm; includes two cable clips.



Art. no.:

445 mm: 961+0509+000

890 mm: 961+0519+000



### NOVUS TSS MobileWorkStation

Mobile WorkStation, consisting of a TSS column on a trolley with CPU holder. In lengths of 1100 and 1800 mm. Includes two cable clips.



Art. no.:

1100 mm: 961+0769+000

1800 mm: 961+0759+000



### NOVUS TSS column with ceiling/floor mount

Column for mounting between ceiling and floor, depends on the type of ceiling and floor. Including mounts, the column has a length of 2500 mm. Customised sizes on request. Length can be corrected by -15 to +15 mm. Includes two cable clips.




Art. no.:

2500 mm: 961+0949+000

## Perfect addition: NOVUS TSS monitor support arms

Fitting the columns from the Tetra Support System, the TSS supporting elements are ideal for mounting the monitor quickly and securely. Thanks to their multi-part articulated design, some of the high-quality folding arms can be turned horizontally through any distance to provide the best possible monitor viewing angle around the entire column.

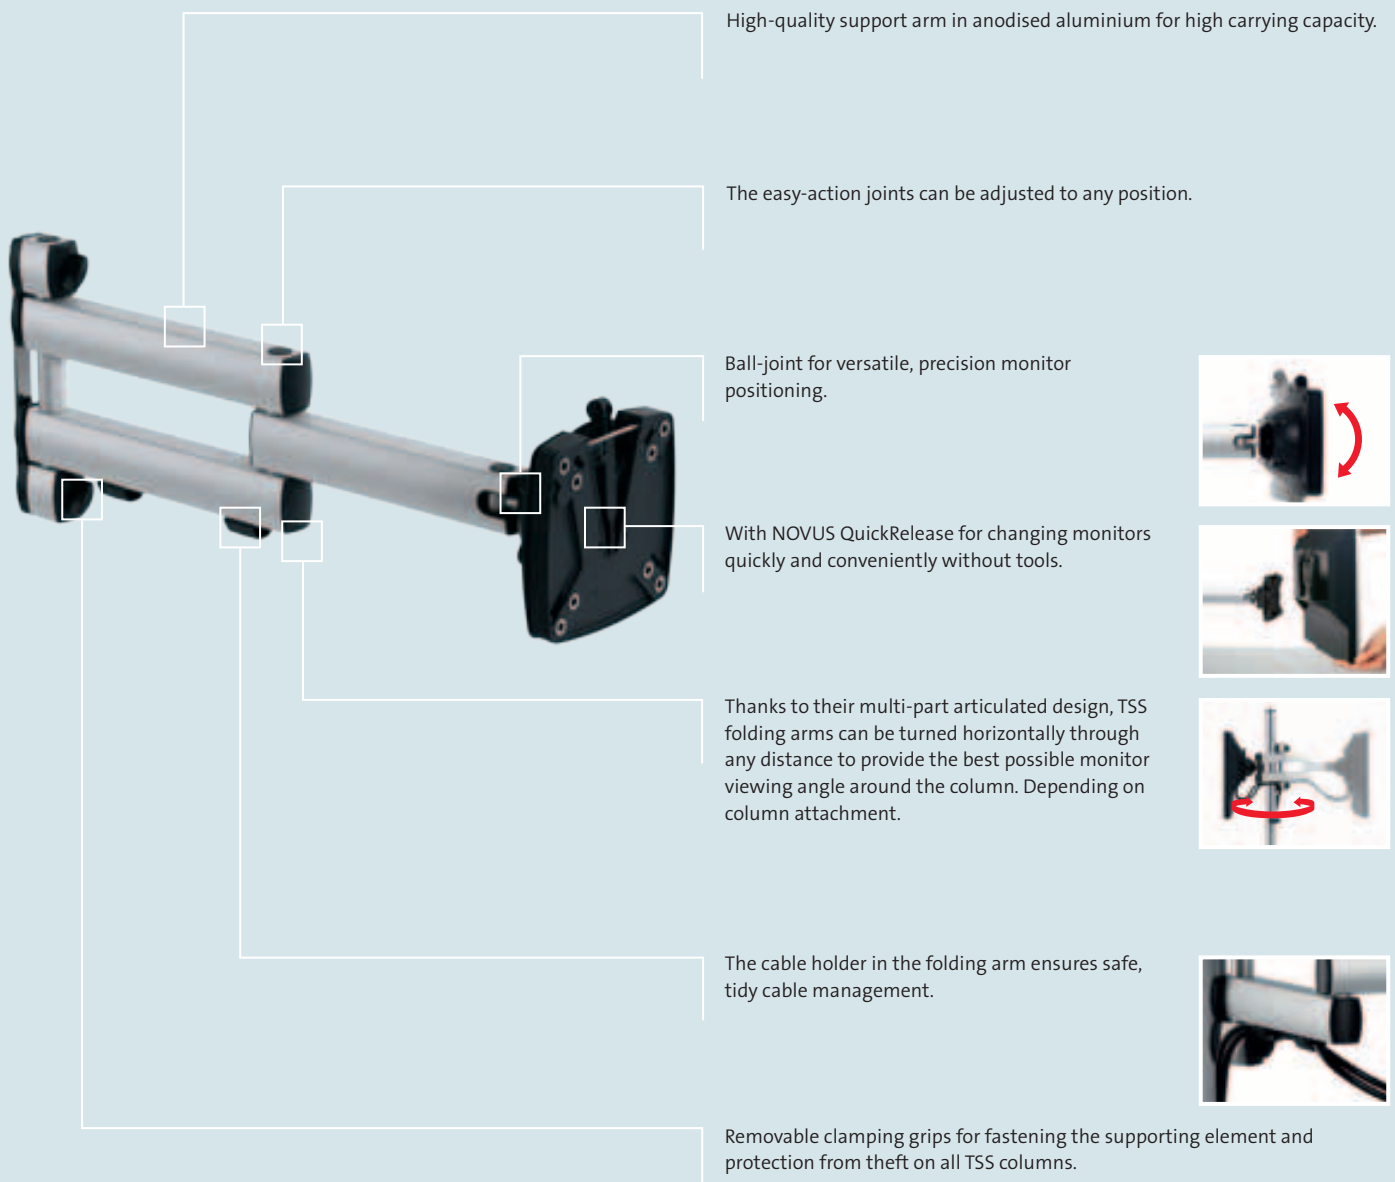






### NOVUS TSS support carriage

High-quality support carriage with QuickRelease for standard 75/100 monitor attachment. For monitors weighing up to 15 kg. Reach: 105 mm.




Art. no.: 963+0119+000




### NOVUS TSS support arm

Support arm with 1-part articulated arm and QuickRelease for standard 75/100 monitor mount. Monitors weighing no more than 15 kg can be infinitely adjusted in any direction. Comes complete with cable holders. Reach: 250 mm.




Art. no.: 962+0119+000

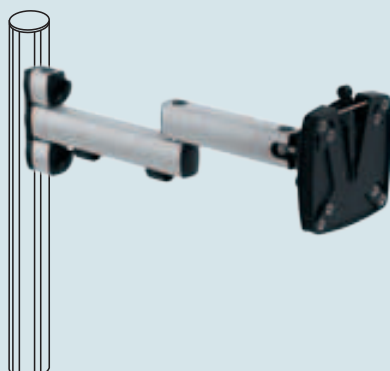


### NOVUS TSS folding arm II

Support arm with 2-part articulated arm and QuickRelease for standard 75/100 monitor mount. Lightweight monitors weighing no more than 10 kg can be infinitely adjusted in any direction. Includes two cable holders. Reach: 450 mm.




Art. no.: 964+0119+000

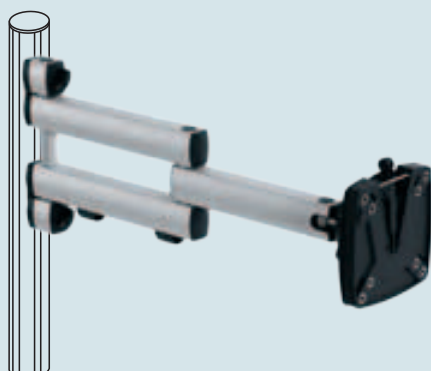


### NOVUS TSS folding arm III

Support arm with reinforced 2-part articulated arm and QuickRelease for standard 75/100 monitor mount. Monitors weighing no more than 15 kg can be infinitely adjusted in any direction. Includes two cable holders. Reach: 505 mm.



Art. no.: 965+0119+000




## NOVUS TSS support carriage 32

Support carriage, particularly suitable for larger-type monitors attached by standard 100 x 100 or 200 x 100 mounts. Carrying capacity 20 kg. Comes complete with M5 and M6 fixing screws. Reach: 64 mm.



Art. no.: 963+0029+001

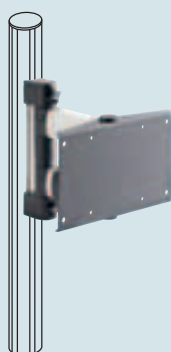


## NOVUS TSS support arm 32

Support arm, particularly suitable for larger-type monitors attached by standard 100 x 100 or 200 x 100 mounts. Carrying capacity 20 kg. Comes complete with M5 and M6 fixing screws as well as cable holders. Reach: 187 mm.



Art. no.: 962+0029+000

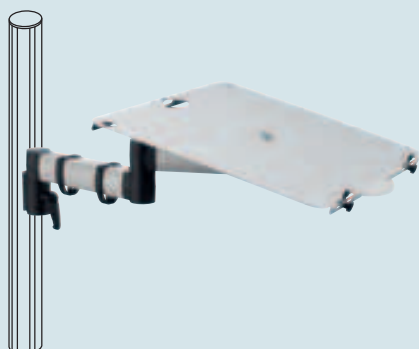


## NOVUS TSS/DSS notebook holder

For supporting notebooks. Carrying capacity: 5 kg. With a 400 x 288 mm support platform, it is also suitable for large notebooks. Fits all TSS/DSS columns. Comes complete with drill hole for anti-theft guard, cable inlet in the support platform and two cable clips. Reach: 523 mm.



Art. no.: 964+1019+004

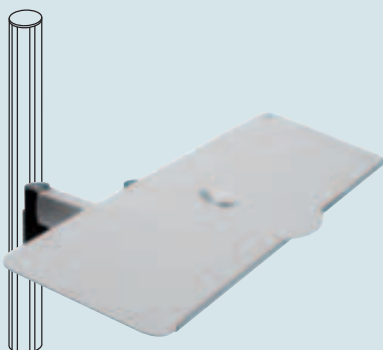

## NOVUS TSS/DSS keyboard holder

For holding computer keyboard and mouse. Can be turned to the side. The support platform measuring 640 x 172 mm can carry up to 5 kg. Fits all TSS/DSS columns. Includes two cable holders. Reach: 472 mm.



Art. no.: 964+1019+005



### NOVUS TSS-LM arm 0-0-1

High-quality monitor supporting element for mounting monitors weighing up to 15 kg to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 122 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces.



Art. no.: 980+0159+000



### NOVUS TSS-LM arm 0-2-1

High-quality monitor support arm for mounting monitors weighing up to 15 kg to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 272 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces. Cable holder for tidy cable management.



Art. no.: 980+4159+000



### NOVUS TSS-LM arm Dual 0-0-4

Practical double monitor support arm for mounting two monitors side by side or one above the other to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 172 mm. Ball-joints for extreme flexibility of movement in the smallest of spaces.




Art. no.: 980+0279+000



### NOVUS TSS-LiftTEC® arm I


High-quality, infinitely adjustable 1-part monitor support arm for mounting to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 397 mm. Comes complete with TSS column adapter. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. no.:


3-8 kg: 980+1089+000

7-15 kg: 980+1159+000

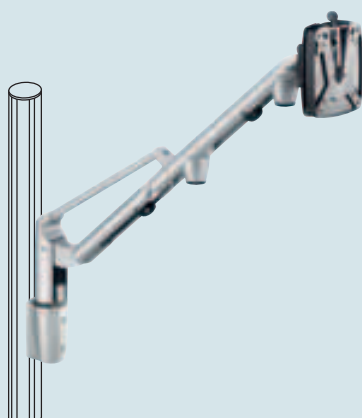

### NOVUS TSS-LiftTEC® arm II


High-quality, infinitely adjustable 2-part monitor support arm for mounting to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 547 mm. Comes complete with TSS column adapter. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. no.:


3-8 kg: 980+2089+000

7-15 kg: 980+2159+000

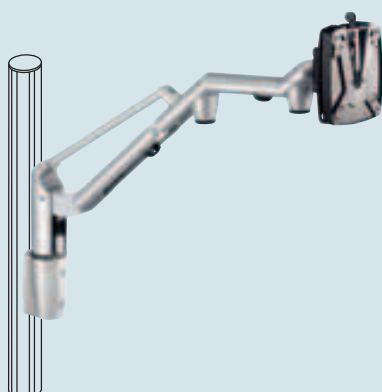

### NOVUS TSS-LiftTEC® arm III


High-quality, 2-part monitor support arm with straight front arm section for mounting to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 547 mm. Comes complete with TSS column adapter. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. no.:


3-8 kg: 980+3089+000

7-15 kg: 980+3159+000

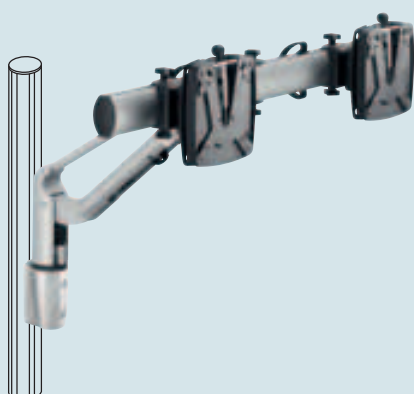

### NOVUS TSS-LiftTEC® arm I Dual

High-quality double monitor support arm for mounting two monitors side by side or one above the other to a Novus TSS column. Standard 75/100 monitor mount with QuickRelease. Reach: 447 mm. Comes complete with TSS column adapter. Adjustable gas spring for infinitely adjusting monitors of various weights.



Art. no.:

980+1279+000



### NOVUS TSS column adapter

The TSS column adapter can be used for attaching products from the more space system with universal clamp 1 or 2 to TSS columns – for even greater combination flexibility.




Art. no.: **796+0829+000**



### NOVUS adapter plate 200 x 100

The 200 x 100 mm adapter plate can be used for securely fitting medium-sized-monitors with the standard 200 x 100 mount.

Art. no.: **795+ 9052 9055 +000**



### NOVUS adapter plate 200 x 200

The 200 x 200 mm adapter plate can be used for securely fitting large monitors with the standard 200 x 200 mount.

Art. no.: **795+ 9065 +000**



### NOVUS TSS cable clip

Ideal for routing cabling directly along the column. Cable clips are easy to attach at any point along the column. Available in a pack of 2.

Art. no.: **961+0005+000**



### NOVUS drop guard

The drop guard can be fitted under the monitor support arm as a precautionary measure to prevent the monitor from slipping off. Fitted above them, it protects the monitor from theft.

Art. no.: **795+9100+000**



## Room for productivity


Organisational walls, such as the NOVUS SlatWall, transform any desk into a place with plenty of scope for concentrating and working productively at. The high-quality partitioning and organisational elements can be combined with TSS and DSS columns and are available in various lengths for maximum flexibility in organising desk workstations to suit individual needs.

Whether as an extension to existing more space system configurations or as a completely new all-inclusive solution: SlatWall elements transform any desk into a personal and perfectly organised place to work at.



## More privacy: NOVUS SlatWall-Visio

The SlatWall-Visio creates a private domain at the workplace. Meeting the different demands in modern offices, the SlatWall-Visio is available in four standard lengths – from 800 mm to 1600 mm. Customised lengths and other colours are also available on request.

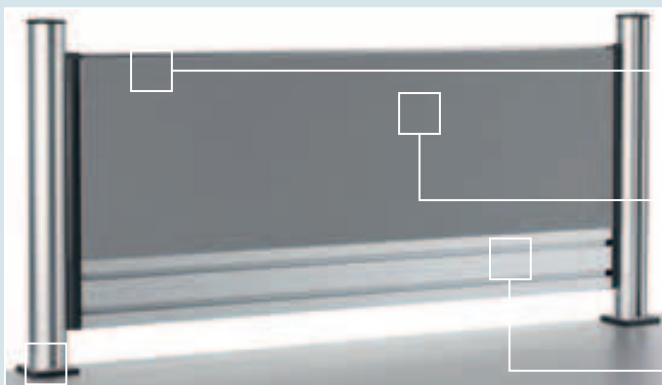

Different lengths always ensure a perfect fit.

Available in a choice of colours, the high-quality Camira-brand fabric cover is perfect for fixing notes to.

Two slots for hooking in storage accessories and monitor support arms provide more space. The SlatWall can also be mounted the other way round, leaving the slots at the top.


Various attachment options provide greater mounting flexibility.





### NOVUS railing 80/100

The railing is available in lengths of 800 and 1000 mm. More space system accessories (see page 39-40) simply hook into the two slots. Not suitable for monitor supporting elements



Art. no.:

800 mm:	972+	0802	0805	+000
1000 mm:	972+	1002	1005	+000




### NOVUS SlatWall 80/100/120

The NOVUS SlatWall is available in lengths of 800 mm, 1000 mm and 1200 mm. Four SlatWall elements are mounted between two TSS-445 columns with system clamp 1. SlatWall monitor supporting elements, SlatWall Boards or SlatWall accessories (see pages 38-41) can be hooked into the SlatWall.



Art. no.:

800 mm:	974+0805+000
1000 mm:	974+1005+000
1200 mm:	974+1205+000

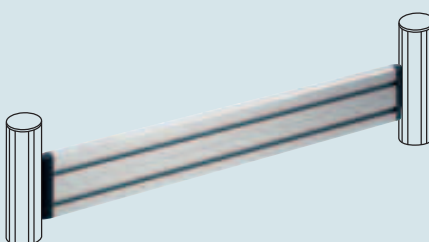

### NOVUS SlatWall element 80/100/120

The various SlatWall elements can be combined with existing TSS and DSS solutions, producing lengths of 800, 1000 or 1200 mm together with the two columns. The elements can be fitted in various numbers and positions.



Art. no.:

800 mm:	973+0805+000
1000 mm:	973+1005+000
1200 mm:	973+1205+000




### NOVUS TSS-SlatWall-Visio 80/100/120/160

The NOVUS TSS-SlatWall-Visio is available in lengths of 800, 1000, 1200 and 1600 mm and can be combined with other products from the more space system. Includes two TSS columns with system clamp 1. Customised colours and sizes are available on request.



Art. no.:

800 mm:	977+	0802	0805	+000
1000 mm:	977+	1002	1005	+000
1200 mm:	977+	1202	1205	+000
1600 mm:	977+	1602	1605	+000

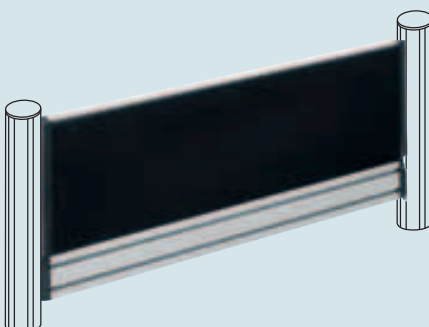


### NOVUS SlatWall-Visio element 80/100/120/160

The various SlatWall-Visio elements can be combined with existing TSS and DSS solutions, producing lengths of 800, 1000, 1200 or 1600 mm together with the two columns. Customised sizes and colours are available on request.

Art. no.:

800 mm:	976+	0802	0805	+000
1000 mm:	976+	1002	1005	+000
1200 mm:	976+	1202	1205	+000
1600 mm:	976+	1602	1605	+000

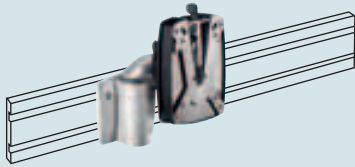


### NOVUS SlatWall-LM arm 0-0-1

High-quality monitor support carriage for mounting monitors weighing up to 8 kg to a SlatWall. Standard 75/100 monitor mount with QuickRelease. Reach: 125 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces.



Art. no.: 981+0089+000

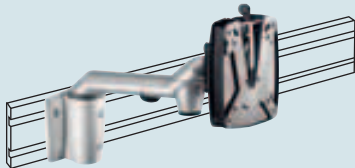


### NOVUS SlatWall-LM arm 0-2-1

High-quality monitor support arm for mounting monitors weighing up to 8 kg to a SlatWall. Standard 75/100 monitor mount with QuickRelease. Reach: 275 mm. Ball-joint for extreme flexibility of movement in the smallest of spaces. Cable holder for tidy cable management.




Art. no.: 981+4089+000

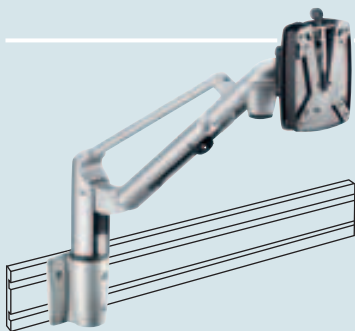


### NOVUS SlatWall-LiftTEC® arm I

High-quality, infinitely adjustable 1-part monitor support arm for mounting to a SlatWall. With gas spring. Standard 75/100 monitor mount with QuickRelease. Reach: 400 mm.




Art. no.: 981+1089+000

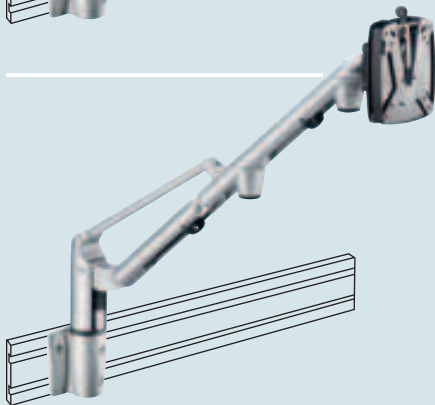


### NOVUS SlatWall-LiftTEC® arm II

High-quality, infinitely adjustable 2-part monitor support arm for mounting to a SlatWall. With gas spring. Standard 75/100 monitor mount with QuickRelease. Reach: 550 mm.




Art. no.: 981+2089+000

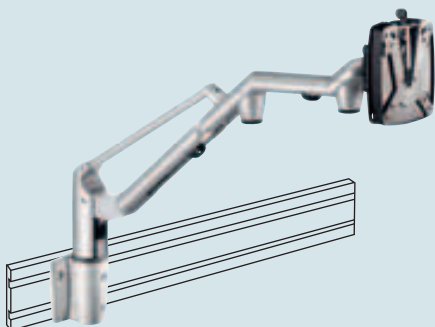

### NOVUS SlatWall-LiftTEC® arm III


High-quality, infinitely adjustable 2-part monitor support arm with a straight front arm section for optimising screen positioning, also with the LiftTEC® arm mounted higher up the SlatWall. With gas spring. Standard 75/100 monitor mount with QuickRelease. Reach: 550 mm.



Art. no.: 981+3089+000

## Practical addition

The practical accessories make the perfect addition to the organisational walls from the NOVUS more space system. From CD rack to pencil cup – the right solution can be put together to suit any specific item.

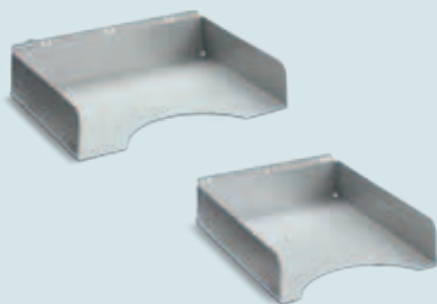

### NOVUS Pura Line tray B4

The practical tray provides plenty of space for documents in sizes up to B4 and is available in “portrait” and “landscape” format. Powder-coated metal.

Dimensions of portrait format: W 248 mm/H 64 mm/D 330 mm.

Dimensions of landscape format: W 330 mm/H 64 mm/D 248 mm.




Art. no.:

lengthways:

723+0019+000

crossways:

723+0029+000

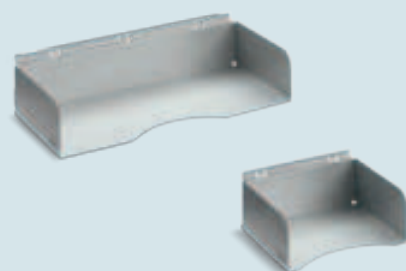

### NOVUS Pura Line multi-purpose box

These multi-purposes boxes are ideal for everything you need on your desk. They are available in two different sizes to suit requirements. Powder-coated metal.

Dimensions of small size: W 165 mm/H 64 mm/D 146 mm.

Dimensions of large size: W 330 mm/H 64 mm/D 146 mm.




Art. no.:

small:

723+0049+000

large:

723+0059+000

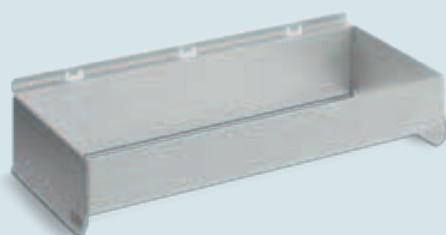


### NOVUS Pura Line hanging file holder

The holder for hanging files takes your files to eye level and keeps them in easy reach whenever you need them. Powder-coated metal. Not suitable for railing. Dimensions: W 330 mm/H 64 mm/D 146 mm.



Art. no.:

723+0079+000



### NOVUS Pura Line CD rack

The attractive CD rack is a real looker on your SlatWall. Powder-coated metal.

Dimensions: W 164 mm/H 83 mm/D 146 mm.

Art. no.:

723+0039+000



### NOVUS Pura Line pencil cup

Taking up very little space on the SlatWall, the pencil cup keeps everything neat and tidy. Powder-coated metal.

Dimensions: W 85 mm/H 84 mm/D 86 mm.

Art. no.:

723+0069+000




## NOVUS Perfora Line desktop magazine file

For storing magazines, can also be used crossways. Sheet metal, lacquered.  
Dimensions: W 118 mm/H 289 mm/D 250 mm.



Art. no.: 724+0029+000

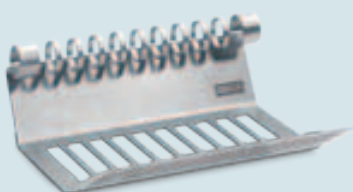

## NOVUS Perfora Line CD rack for 10 CDs

Holds up to ten CDs. Sheet metal, lacquered.  
Dimensions: W 185 mm/H 105 mm/D 150 mm.



Art. no.: 724+0039+000



## NOVUS Perfora Line document tray B4

Holds documents up to B4 size. Sheet metal, lacquered.  
Dimensions: W 305 mm/H 40 mm/D 263 mm.



Art. no.: 724+0019+000




## NOVUS Perfora Line multi-purpose box

Keeps your desk utensils neat and tidy. Sheet metal, lacquered. Dimensions: W 243 mm/H 35 mm/D 165 mm.



Art. no.: 724+0049+000




## NOVUS Perfora Line hanging file set

Keeps your hanging files in easy reach. Sheet metal, lacquered. Dimensions each: W 17 mm/H 60 mm/D 175 mm.



Art. no.: 724+0079+000



## NOVUS Perfora Line telephone support

Creates space. Sheet metal, lacquered.  
Dimensions: W 240 mm/H 45 mm/D 255 mm.



Art. no.: 724+0059+000



## NOVUS Perfora Line pencil cup

Holds a large quantity of pens and pencils. Sheet metal, lacquered.  
Dimensions: W 75 mm/H 107 mm/D 75 mm.



Art. no.: 724+0069+000





### NOVUS SlatWall-Board 60/80/100

The elegant shelf for storing files, books or other office utensils is available in the three different lengths of 600 mm, 800 mm and 1000 mm. A depth of 302 mm provides optimum support for upright files. The infinitely adjustable end hoops are extremely practical.



Art. no.:

600 mm: 760+0605+000

800 mm: 760+0805+000

1000 mm: 760+1005+000



### NOVUS SlatWall adapter

The perfect solution for attaching standard MSS products compatible with universal clamp 1 or 2 to the SlatWall. With a carrying capacity of up to 8 kg. The SlatWall adapter is also suitable for hooking in to other organisational walls from the office-furniture industry.



Art. no.:

796+0839+000



### NOVUS SlatWall Cable clip

Ideal for routing cables along the SlatWall. The cable clips are easy to attach to the SlatWall. Available in a pack of 3.

Art. no.:

796+0005+000



### NOVUS Balance 30


The height-adjustable Balance 30 using the 75/100 mounting standard evens out height differences of  $\pm 30$  mm between monitors positioned side by side.

Art. no.:

795+9075+000

## Always in the right light

The NOVUS OfficeLight PRO and NOVUS OfficeLight deLuxe lights guarantee optimum lighting at any desk. Equipped with adjustable plastic joints, swivelling through 360° and featuring high-quality aluminium articulated arms with spring balancing mechanism, these lights can be positioned with exceptional flexibility and convenience.

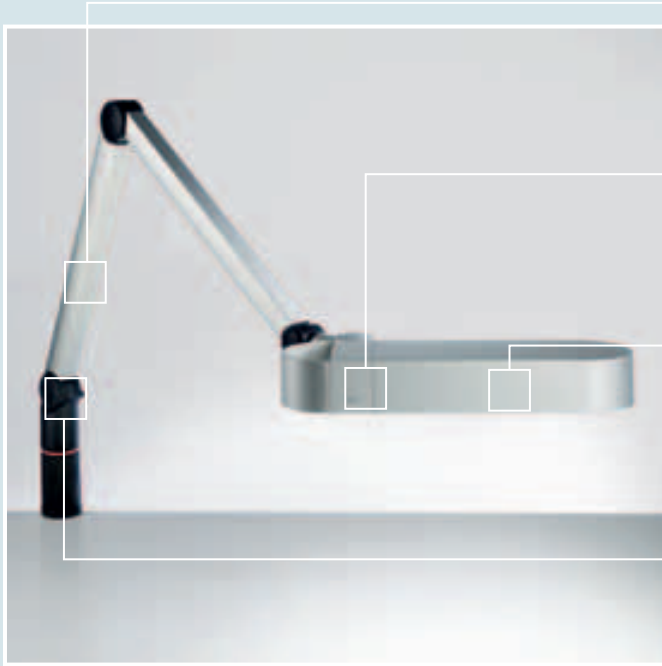

With the internal cable routing system, the desk is left free of cables.

The NOVUS OfficeLight PRO is absolutely glare-free as a result of even light distribution from the parabolic grid reflector.



Available with an 18-watt TC-L compact fluorescent lamp for absolutely bright light that illuminates the entire desk. The OfficeLight deLuxe is alternatively available with an 11-watt TC-SEL lamp.

Adjustable plastic joints for flexibility and convenience positioning the light.



Integrated electric ballast for non-flickering, instantaneous start.




## Possible combinations





### NOVUS OfficeLight PRO I

High-quality desk light with 1-part aluminium arm, plastic joints and spring balancing mechanism for infinitely variable height adjustment and reach of 694 mm. Fitted with an 18 W TC-L compact fluorescent lamp. Cable length: approx. 2.3 m.



Art. no.: 734+ 0012 +000


0015

0019



### NOVUS OfficeLight PRO II

The optimum desk light with 2-part aluminium arm, plastic joints and spring balancing mechanism for infinitely variable height adjustment and reach of 980 mm. Fitted with an 18 W TC-L compact fluorescent lamp. Cable length: approx. 2 m.



Art. no.: 735+ 0012 +000


0015

0019



### NOVUS OfficeLight deLuxe I

Adjustable desk lamp with 1-part aluminium arm with plastic joints and spring balancing mechanism. Infinitely adjustable with a reach of 786 mm. Fitted with an 11 or 18 W TC-L compact fluorescent lamp. Cable length: approx. 2.3 m.



Art. no.: 731+ 0002 +000

11 W: 0005

0009

18 W: 731+ 0012 +000


0015

0019



### NOVUS OfficeLight deLuxe II

Versatile desk lamp with 2-part aluminium arm, plastic joints and spring balancing mechanism. Infinitely adjustable with a reach of 1075 mm. Fitted with an 11 or 18 W compact fluorescent lamp. Cable length: approx. 2 m.



Art. no.: 732+ 0002 +000

11 W: 0005

0009


18 W: 732+ 0012 +000

0015



0019

## Absolutely adaptable

The universal support arms from Novus are the ideal answer for a well-organised workplace. Capable of accommodating telephones and even notebooks, their carrying capacity can be upgraded.

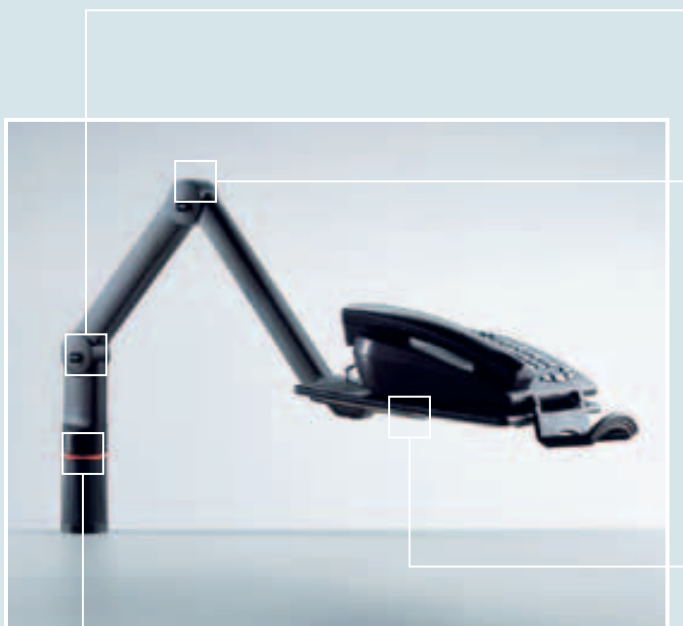

Cable holder for tidy telephone cable management.



Three-stage adjustable support arm for flexible telephone positioning. The angle of inclination of the telephone platform automatically adjusts to the selected position and ensures convenient handling.

The platform can be mounted crossways or lengthways, just as the situation demands.

The universal support arms can be turned through 360°, providing greater flexibility.



### NOVUS TalkMaster

Telephone swivel arm with 2-part articulated arm for positioning in three fixed stages. The flexible platform can be mounted crossways or lengthways.




Art. no.: 710+ 0002 0005 +000



### NOVUS PhoneMaster

Compact design offering a high carrying capacity making it particularly suitable for larger and heavier-type telephones. Overall height: 215 mm.




Art. no.: 713+ 0002 0005 +000



### NOVUS ScopeMaster

With smoothly telescoping swivel arm and pivoting support platform inclined towards the user. Cables routed internally inside the aluminium support arm. Overall height: 222 mm



Art. no.: 714+ 0002 +000  
0005  
0009




### NOVUS extension platforms

Set of 2 intermediate platforms with 4 clip connectors for easy assembly. Increase the size of supporting platforms from 258 x 172 mm to 258 x 258 mm or 258 x 344 mm.



Art. no.: 795+ 0902 0905 +000

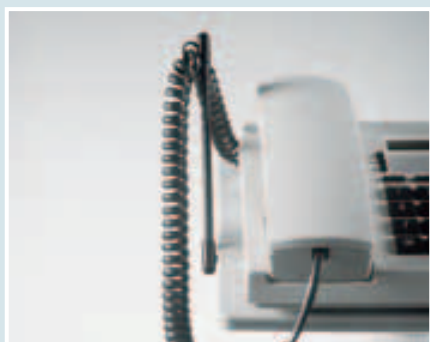


### NOVUS spiral cord support

Easily mounted on all Novus phone supporting platforms. Prevents cables from dangling or getting caught, particularly when swivelling the arm.

Art. no.: 795+ 4002 4005 +000

## A truly talented organiser

Absolute efficiency is possible no matter how small the space – as demonstrated by the NOVUS CopySwinger system. These sturdy trays permit well-structured desk organisation and can be combined in any way with other products from the NOVUS more space system.

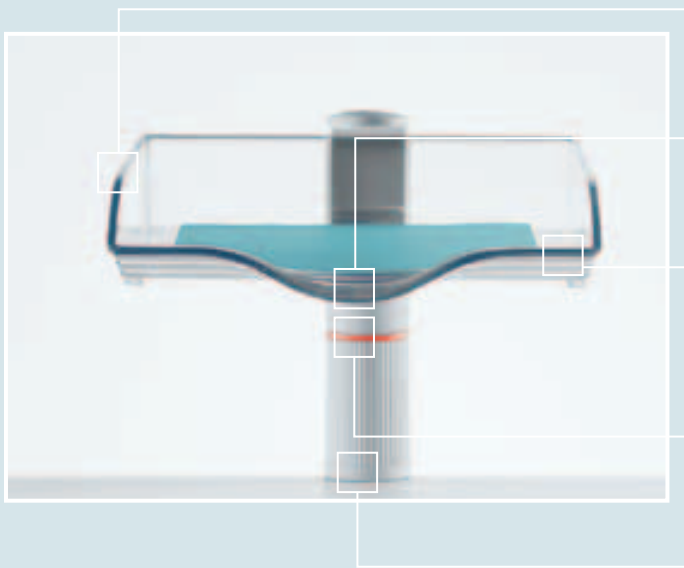


Mounting either lengthways or crossways, the individual trays can also be stacked without function column.

Plastic trays with practical grip recess makes handling easy.

Transparent label holder and paper insert are included.


The individual tray can be turned through 360°.

NOVUS CopySwingers can be combined with each other and extended with other products that are attached by means of universal clamp 1.

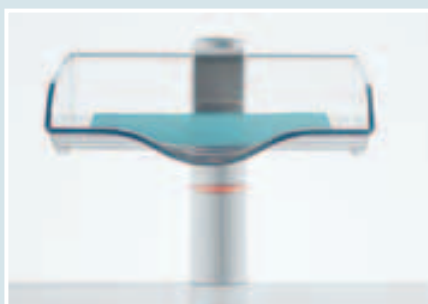


### NOVUS CopySwinger I

The single tray for easy filing. Can be extended with other more space system products. Overall height: 215 mm.

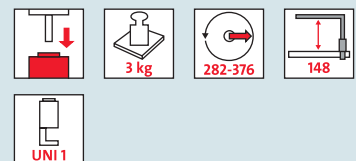


Art. no.: 720+ 1002 **1005** +000

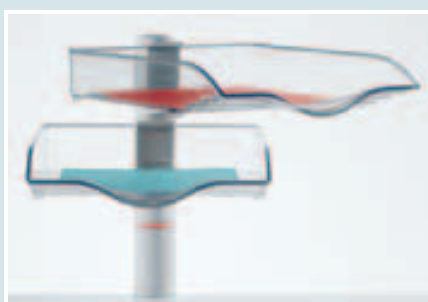

### NOVUS CopySwinger II

Well organised with two trays. Easy to extend with other more space system products. Overall height: 310 mm.

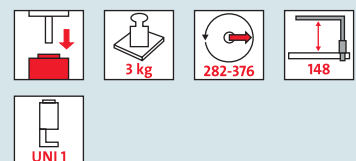


Art. no.: 720+ 2002 **2005** +000





### NOVUS CopySwinger III

The classic set for "in", "out" and "file". Easy to extend with other more space system products. Overall height: 405 mm.




Art. no.: 720+ 3002 **3005** +000



### NOVUS CopySwinger IV

Four trays, an ideal size. Overall height: 500 mm.




Art. no.: 720+ 4002 **4005** +000



### NOVUS CopySwinger V

Organisation times five. Each department has its tray. Overall height: 595 mm.




Art. no.: 720+ 5002 **5005** +000



### NOVUS CopySwinger Duo II

Two sets of trays one above the other. Easy to extend with other more space system products.




Art. no.: 721+ 4002 **4005** +000




### NOVUS CopySwinger Duo III

Three sets of three trays one above the other. Easy to extend with other more space system products.



Art. no.: 721+ 6002 **6005** +000

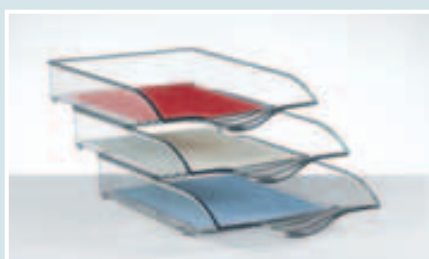

### NOVUS CopyTray, single tray

B4 single trays can be stacked straight or offset, slightly tinted, with practical handle moulding. Label holder and paper insert are included...



Art. no.: 720+0000+000

## Clear structures

First class in looks and function, the BoardMasters from Novus add structure to filing. Whether over a width of 100 or 120 cm: With these practical filing systems, everything's certain to land in the right tray.




Can be extended with other more space system products.



The width of the three compartments can be varied for better organisation at the workplace.


Attractive design fits perfectly into existing office architecture.

Using the third level for more room at the desk.

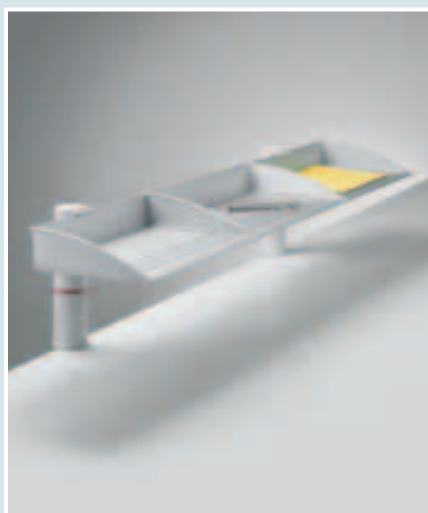

### NOVUS BoardMaster 100/120


The ideal storage solution. Perfect for extending with other Novus products suitable for attachment by means of universal clamp 1, such as OfficeLight PRO or deLuxe. Compartment depth: 195 mm.



Art. no.:

1000 mm: 750+ 0502 **0505** +000

1200 mm: 750+ 0602 **0605** +000



Art. no.:


1000 mm: 750+ 0552 **0555** +000

1200 mm: 750+ 0652 **0655** +000



### NOVUS Duo-BoardMaster 100/120


Ideal for two workplaces facing each other. Can be extended with other more space system products that are attached by means of universal clamp 1. Compartment depth: 195 mm.



Art. no.:

1000 mm: 751+ 2502 **2505** +000

1200 mm: 751+ 2602 **2605** +000



Art. no.:

1000 mm: 751+ 2562 **2565** +000

1200 mm: 751+ 2662 **2665** +000

## Organisation bit by bit

The NOVUS FileMaster is synonymous with organisation across the board. Finished in a high quality and equipped with infinitely adjustable book ends, it even provides a whole row of files with plenty of support.



Extremely high loading capacity of up to 100 kg.

Sturdy, infinitely adjustable ends give files sufficient support and prevent anything from slipping.


Sturdy, attractive desktop foot.

High-quality, ribbed aluminium surface with back edge.



### NOVUS FileMaster 80/100/120

For standing on the desk. With a loading capacity of up to 100 kg and available in the three different lengths of 800 mm, 1000 mm and 1200 mm. Adjustable side supports prevent files and books from tipping over. Compartment depth: 304 mm.



Art. no.:

800 mm: 762+ 0802 0805 +000


1000 mm: 762+ 1002 1005 +000

1200 mm: 762+ 1202 1205 +000



### NOVUS FileMaster 34

For mounting on top of extendible more space system products. Ideal for two workplaces facing each other. The large shelf is suitable for holding files or books. Width: 340 mm. Compartment depth: 304 mm.



Art. no.: 762+ 0342 0345 +000

## Always to hand

The ViewMasters from Novus are true all-round talents. In many work areas, these practical carousels ensure that even complex information is always in view and easy reach.



Display pockets can be fitted with indicator tabs to make information easier to find.



The display pockets for DIN A4 can be used in all NOVUS display pocket holders and guarantee clearly presented information.

Integrated spring-balancing mechanism in the aluminium arm of ViewMaster Ergo II permits infinitely variable arm adjustment.

Swivels through 360°.



### NOVUS ViewMaster-Fix

2-piece plastic articulated arm with three automatic locking positions. For twelve A4 display pockets. Display pockets not included.



Art. no.: 748+ 0002 0005 +000



### NOVUS ViewMaster-Ergo II

2-part aluminium arm with adjustable plastic joints and spring balancing mechanism for convenient, infinitely-variable adjustment. For twelve A4 display pockets. Display pockets not included.



Art. no.: 748+ 2002 +000


2005

2009



### NOVUS ViewMaster carousel

Swivelling support arm with mount supported in ball bearings for 30 or 40 display pockets in A4 size, at convenient eye level. Display pockets not included.



Art. no.: 748+ 3002 3005 +000



### NOVUS ViewMaster desktop carousel

The sturdy solid base accommodates 30 or, alternatively, 40 display pockets in A4 size. Overall height: 394 mm. Display pockets not included.



Art. no.: 748+ 7702 7705 +000



### NOVUS display pockets

With swivel pins and plastic frames, available in seven colours, open on one long side. For DIN A4. Packed individually.

Art. no.: 795+ 4801 +000

4804

4808

4812

4802

4806


4811



### NOVUS indicator tabs

Twelve indicator tabs per set with paper inlays pre-printed from A–Z. Transparent and clip-on, size 25 x 20 mm, visible area 25 x 10 mm.


Art. no.: 795+ 4850 +000

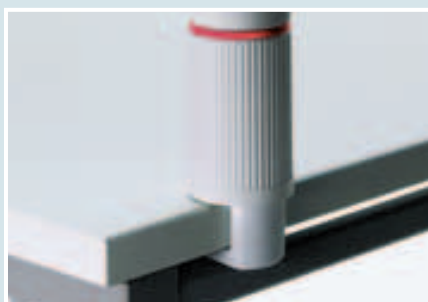

## NOVUS universal clamp 1

Clamping length 18-74 mm.


Art. no.: 795+ 0102 0105 +000

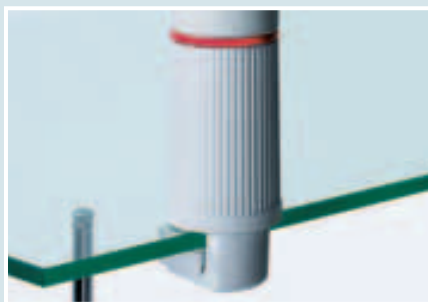

## NOVUS universal clamp 1 for glass tables

Clamping length 8-64 mm.


Art. no.: 795+ 0152 0155 +000

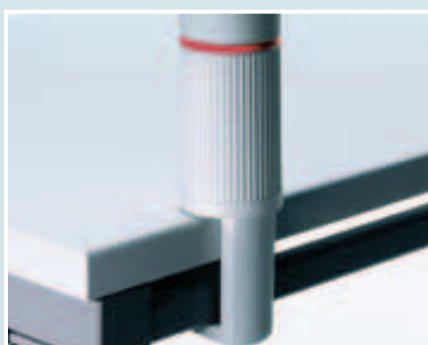

## NOVUS universal clamp 1 with large clamping length

Clamping length 67-121 mm.

Art. no.: 795+ 0112 0115 +000

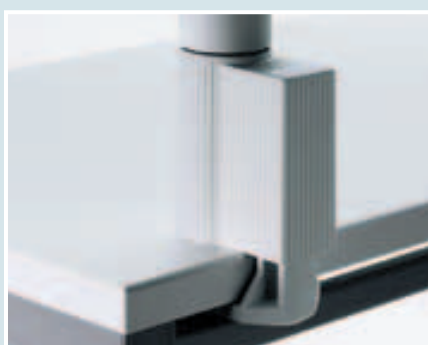

## NOVUS universal clamp 2

Clamping length 16-76 mm, particularly large clamping depth of 64 mm.

Art. no.: 795+ 0202 0205 +000



## NOVUS base

Base with a diameter of 260 mm and a weight of 6 kg

Art. no.: 795+ 7802 7805 +000





### NOVUS screw-on plate

A: Plastic screw-on plate for universal clamp 1.  
B: Metal screw-on plate, includes metal screw sleeve.

Art. no.:

A: 795+ 1502 **1505** +000

B: 795+ 1602 **1605** +002



### NOVUS drilling screw fitting

14 mm Ø drill hole

Art. no.: 796+ 0342 **0345** +000



### NOVUS metal wall bracket

Wall bracket, metal

Art. no.: 796+ 0842 **0849** +000



### NOVUS plastic wall bracket

Wall bracket, plastic



Art. no.: 795+ 2002 **2005** +000

## FLAT SCREEN HOLDERS

### Product

### JetMaster I

### JetMaster II



Action radius (mm):	221 - 287	140 - 402
Height adjustment	mechanical spring system for infinitely variable adjustment	mechanical spring system for infinitely variable adjustment
Loading capacity (kg):	2,5 - 5 / 5 - 7,5	3,5 - 5
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100
Weight (kg):	1,8	2,0
Mounting:	Universal clamp 2	Universal clamp 2
Material*:	A, P, S	A, P, S
TÜV GS:	■	■
Warranty:	2 years	2 years
Catalogue page:	20	20





### Product

### LiftTEC® arm I

### LiftTEC® arm II

### LiftTEC® arm III

### LiftTEC® arm I Dual



Action radius (mm):	365	515	515	415
Height adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment
Loading capacity (kg):	3 - 8 / 7 - 15	3 - 8 / 7 - 15	3 - 8 / 7 - 15	2 x 3 - 7
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■	■
Weight (kg):	3,7	4,2	4,1	5,5
Mounting:	LiftTEC® desktop mounting	LiftTEC® desktop mounting	LiftTEC® desktop mounting	LiftTEC® desktop mounting
Material*:	A, P, S	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	19	19	19	20

\* Material: A = aluminium, K = plastic, S = steel

■ provided □ not provided

Product	JetMaster WH	QuickMount	LM arm 0-0-1 WH	LM arm 0-2-1 WH
Action radius (mm):	92	□	125	275
Loading capacity (kg)**:	10	25	8	8
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■	■
Weight (kg):	0,8	0,4	1,3	1,7
Mounting:	Wall mounting	Wall mounting	Wall mounting	Wall mounting
Material*:	A, P, S	P, S	A, P, S	A, P, S
TÜV GS:	□	■	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	20	20	21	21

Product	LiftTEC® arm I WH	LiftTEC® arm II WH	LiftTEC® arm III WH
Action radius (mm):	400	550	550
Height adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment
Loading capacity (kg)**:	3 - 8	3 - 8	3 - 8
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■
Weight (kg):	2,5	3,0	2,9
Mounting:	Wall mounting	Wall mounting	Wall mounting
Material*:	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■
Warranty:	2 years	2 years	2 years
Catalogue page:	21	21	21

\*\* depending on nature of wall

## Flat screen holders

Product	ScreenMaster Vario 50 WH	ScreenMaster Vario 50 D	ScreenMaster Vario 50 S	ScreenMaster Vario 50 S Plus
Length / height (mm):	□	900 - 1600	1650	1650
Loading capacity (kg):	60**	60**	60	60
Standard monitor mounting (mm):	up to 700 x 460	up to 700 x 460	up to 700 x 460	up to 700 x 460
Special features:	Anti-theft guard	Cable routed inside	Cable routed inside	Cable routed inside
Tilts:	0-15°	-5° to +30°	□	□
Turns:	□	360°	-20° to +20°	-20° to +20°
Weight (kg):	5,9	13,0	27,5	35
Mount (mm):	Wall mounting (705x133)	Ceiling mounting (80x80)	Base (800 x 550)	Base (800 x 550)
Material*:	S	S	S	S
TÜV GS:	■	■	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	22	22	23	23

Product	BeamMaster I	Telescopic ceiling extension
Distance from ceiling (mm):	170	400 - 700
Tilts:	25°	□
Turns:	360°	□
Loading capacity (kg):	10**	□
Weight (kg):	1,7	1,1
Mount (mm):	Projector: Universal (350 mm max.) / ceiling: 80 x 80	□
Material*:	S	S
TÜV:	■	■
Warranty:	2 years	2 years
Catalogue page:	23	23

\* Material: A = aluminium, P = plastic, S = steel

■ provided □ not provided

\*\* depending on nature of wall/ceiling





Product	DSS column with system clamp 1 (14-40 / 13-25)	DSS column with system clamp 2	DSS column with drilling screw fitting	DSS column with cable port attachment	DSS column with pin adapter	DSS column with system rail mount
Column length (mm)**:	445	445	445	445	445	445
Weight (kg):	1,3 / 1,2	1,5	1,0	1,3	1,3	1,3
Mounting:	System clamp 1	System clamp 2	Drilling screw fitting	Cable port attachment	Pin adapter	System rail attachment
Desktop thickness (mm):	14 - 40 / 13 - 25	5 - 70	5 - 55	5 - 55	46	□
Material*:	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S
TÜV:	■ / □	■	■	■	□	□
Customised dimensions	■	■	■	■	■	■
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years
Catalogue page:	25	25	25	25	25	25





Product	TSS column with system clamp 1 (14 - 40 mm)	TSS column with system clamp 1 (13 - 25 mm)	TSS column with system clamp 2	TSS column with base	TSS column with drilling screw fitting	TSS column with cable port attachment
Column length (mm)**:	445 / 545	445	445 / 545	445	445 / 545 / 845	445 / 545 / 845
Weight (kg):	1,7 / 1,9	1,6	1,8 / 2,1	5,6	1,3 / 1,6 / 2,2	1,6 / 1,9 / 2,5
Mounting:	System clamp 1 (14-40 mm)	System clamp 1 (13 - 25 mm)	System clamp 2	Base Ø 320 mm	Drilling screw fitting	Cable port attachment
Desktop thickness (mm):	14 - 40	13 - 25	5 - 70	□	5 - 55	5 - 55
Material*:	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S
TÜV:	■	□	■	■	■	■
Customised dimensions	■	■	■	■	■	■
Warranty:	5 years	5 years	5 years	5 years	5 years	5 years
Catalogue page:	28	28	28	28	28	28

Product	TSS column with pin adapter	TSS column with system rail attachment	TSS column with ceiling mount	TSS column with ceiling/floor mount	TSS MobileWorkStation	TSS wall rail
Column length (mm)**:	445	445	845	2500	1100 / 1800	445 / 890
Weight (kg):	1,3	1,3	3,0	2,1	13,1 / 14,9	0,8 / 1,4
Mounting:	Pin adapter	System rail attachment	Ceiling mount	Ceiling/floor mount	Trolley	Wall rail
Desktop thickness (mm):	46	□	□	□	□	□
Material*:	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S	A, P
TÜV:	□	□	■	□	□	■
Customised dimensions	■	■	■	■	■	■
Warranty:	5 years	5 years	5 years	5 years	2 years	5 years
Catalogue page:	29	29	29	29	29	29

\*\*\* measured without mount & plastic cap

## Flat screen holders





Product	System clamp 1 (14 - 40 mm)	System clamp 1 (13 - 25 mm)	System clamp 2	Base (Ø 320 mm)
				
Weight (kg):	0,6	0,6	0,6	4,0
Desktop thickness (mm):	14 - 40	13 - 25	5 - 70	□
Material*:	S	S	S	S
TÜV GS:	■	□	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	28	28	28	28



Product	Drilling screw fitting	Cable port attachment	Pin adapter	System rail mount TSS
				
Weight (kg):	0,6	0,6	0,6	0,6
Desktop thickness (mm):	5 - 55	5 - 55	46	□
Material*:	S	S	S	S
TÜV GS:	■	■	□	□
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	28	28	29	29

\* Material: A = aluminium, P = plastic, S = steel





■ provided □ not provided







Product	System rail mount DSS	Ceiling mount	Ceiling/floor mount	MobileWorkStation
				
Weight (kg):	0,6	0,6	0,6	10,3
Material*:	S	S	S	S
TÜV GS:	□	■	□	□
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	25	29	29	29

Product	DSS support carriage	DSS folding arm
		
Action radius (mm):	58	398
Height adjustment	infinitely adjustable by screw	infinitely adjustable by screw
Loading capacity (kg):	7,5	5
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100
Weight (kg):	0,6	1,2
Mounting:	DSS column mounting	DSS column mounting
Material*:	P, S	A, P, S
TÜV GS:	■	■
Warranty:	2 years	2 years
Catalogue page:	26	26

## Flat screen holders

Product	TSS support carriage	TSS support arm	TSS folding arm II	TSS folding arm III
				
Action radius (mm):	105	250	450	505
Height adjustment	infinitely adjustable by screws	infinitely adjustable by screws	infinitely adjustable by screws	infinitely adjustable by screws
Loading capacity (kg):	15	15	10	15
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■	■
Weight (kg):	0,9	1,0	1,3	1,7
Mounting:	TSS column mounting	TSS column mounting	TSS column mounting	TSS column mounting
Material*:	A, P, S	A, P, S	A, P, S	A, P, S
Customised dimensions possible:	□	■	■	■
Lockable joints:	■	■	■	■
TÜV GS:	■	■	■	■
Warranty:	5 years	5 years	5 years	5 years
Catalogue page:	31	31	31	31

Product	TSS support carriage 32	TSS support arm 32	TSS/DSS notebook holder	TSS/DSS keyboard holder
				
Action radius (mm):	64	187	523	472
Height adjustment	infinitely adjustable by screws	infinitely adjustable by screws	infinitely adjustable by screw	infinitely adjustable by screw
Loading capacity (kg):	20	20	5	5
Standard monitor mounting (mm):	100 x 100 / 200 x 100	100 x 100 / 200 x 100	Plate 400 x 288	Plate 640 x 172
Weight (kg):	1,0	1,8	2,2	2,3
Mounting:	TSS column mounting	TSS column mounting	TSS/DSS column mounting	TSS/DSS column mounting
Material*:	A, P, S	A, P, S	A, P, S	A, P, S
Customised dimensions	□	□	■	■
TÜV GS:	□	□	■	■
Warranty:	5 years	5 years	2 years	2 years
Catalogue page:	32	32	32	32




\* Material: A = aluminium, P = plastic, S = steel



■ provided □ not provided

Product	TSS LM arm 0-0-1 WH	TSS LM arm 0-2-1 WH	TSS-LM arm Dual 0-0-4
Action radius (mm):	122	272	172
Height adjustment	infinitely adjustable by screws	infinitely adjustable by screws	infinitely adjustable by screws
Loading capacity (kg):	15	15	2 x 7
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■
Weight (kg):	1,3	1,7	3,4
Mounting:	TSS column mounting	TSS column mounting	TSS column mounting
Material*:	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■
Warranty:	2 years	2 years	2 years
Catalogue page:	33	33	33

Product	TSS-LiftTEC® arm I	TSS-LiftTEC® arm II	TSS-LiftTEC® arm III	TSS-LiftTEC® arm I Dual
Action radius (mm):	397	547	547	447
Height adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment
Loading capacity (kg):	3 - 8 / 7 - 15	3 - 8 / 7 - 15	3 - 8 / 7 - 15	2 x 3 - 7
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■	■
Weight (kg):	2,5	3,0	2,9	4,2
Mounting:	TSS column mounting	TSS column mounting	TSS column mounting	TSS column mounting
Material*:	A, P, S	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	34	34	34	34

## Organisational walls



Product	Railing 80 / 100	SlatWall 80 / 100 / 120	SlatWall element 80 / 100 / 120
			
Size (width mm):	800 / 1000	800 / 1000 / 1200	683 / 883 / 1083
Weight (kg):	2,7 / 3,0	10,1 / 11,8 / 13,5	1,5 / 1,9 / 2,3
Mounting:	Universal clamp 1	System clamp 1	TSS / DSS column attachment
Material*:	A, P, S	A, P, S	A, P, S
Customised length possible:	■	■	■
Warranty:	2 years	5 years	5 years
Catalogue page:	37	37	37




Product	SlatWall-Visio 80 / 100 / 120 / 160	SlatWall-Visio element 80 / 100 / 120 / 160
		
Size (width mm):	800 / 1000 / 1200 / 1600	683 / 883 / 1083 / 1483
Weight (kg):	9,6 / 10,9 / 12,2 / 14,8	5,4 / 6,7 / 8,0 / 10,6
Mounting:	System clamp 1	TSS / DSS column attachment
Material*:	A, P, S, H, F	A, P, S, H, F
Customised dimensions possible:	■	■
Warranty:	2 years	2 years
Catalogue page:	37	37

\* Material: A = aluminium, P = plastic, S = steel, W = wood, F = fabric

■ provided □ not provided





## Flat screen holders for organisational walls

Product	SlatWall-LM arm 0-0-1	SlatWall-LM arm 0-2-1
		
Action radius (mm):	125	275
Loading capacity (kg):	8	8
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■
Weight (kg):	1,3	1,8
Mounting:	SlatWall attachment:	SlatWall attachment:
Material*:	A, P, S	A, P, S
TÜV GS:	■	■
Warranty:	2 years	2 years
Catalogue page:	38	38

Product	SlatWall-LiftTEC® arm I	SlatWall-LiftTEC® arm II	SlatWall-LiftTEC® arm III
			
Action radius (mm):	400	550	550
Height adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment	gas spring system for infinitely variable adjustment
Loading capacity (kg):	3 - 8	3 - 8	3 - 8
Standard monitor mounting (mm):	75 x 75 / 100 x 100	75 x 75 / 100 x 100	75 x 75 / 100 x 100
QuickRelease:	■	■	■
Weight (kg):	2,5	3,0	2,9
Mounting:	SlatWall attachment:	SlatWall attachment:	SlatWall attachment:
Material*:	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■
Warranty:	2 years	2 years	2 years
Catalogue page:	38	38	38

## TECHNICAL INFORMATION

### Lights

Product	OfficeLight PRO I	OfficeLight PRO II	OfficeLight deLuxe I	OfficeLight deLuxe II
				
Wattage (watts):	18 W TC-L	18 W TC-L	11 W TC-SEL / 18 W TC-L	11 W TC-SEL / 18 W TC-L
Action radius (mm):	694	980	786	1075
Height adjustment	infinitely adjustable	infinitely adjustable	infinitely adjustable	infinitely adjustable
Lighting concept:	Mirrored parabolic grid reflector	Mirrored parabolic grid reflector	asymmetrical light distribution	asymmetrical light distribution
Light intensity (lux):	670	670	540	710
Voltage (volts):	230 - 240	230 - 240	230 - 240	230 - 240
Cable length (mm)	2300	2000	2300	2000
Weight (kg):	2,6	2,8	3,2 / 2,9	3,4 / 3,1
Mounting:	Universal clamp 1	Universal clamp 1	Universal clamp 1	Universal clamp 1
Material*:	A, P, S	A, P, S	A, P, S	A, P, S
TÜV GS:	■	■	■	■
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	43	43	43	43

### Universal support arms

Product	TalkMaster	PhoneMaster	ScopeMaster
Action radius (mm):	415 - 700	383	464 - 606
Height adjustment	3-stage adjustment	□	Telescopic
Loading capacity (kg):	2	6	2
Height above desk (mm):	0 - 155	140	175
Weight (kg):	1,6	1,0	1,3
Mounting:	Universal clamp 1	Universal clamp 1	Universal clamp 1
Material*:	P, S	P, S	A, P, S
Warranty:	2 years	2 years	2 years
Catalogue page:	44	45	45

\* Material: A = aluminium, P = plastic, S = steel

■ provided □ not provided



## Letter tray sets

Product	CopySwinger I	CopySwinger II	CopySwinger III	CopySwinger IV
Action radius (mm):	282 - 376	282 - 376	282 - 376	282 - 376
Height (mm):	215	310	405	500
Loading capacity per tray (kg):	3	3	3	3
Height above desk (mm):	148	148	148	148
Number of trays:	1	2	3	4
Weight (kg):	1,1	2,0	2,9	3,8
Mounting:	Universal clamp 1	Universal clamp 1	Universal clamp 1	Universal clamp 1
Material*:	P, S	P, S	P, S	P, S
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	46	46	47	47

Product	CopySwinger V	CopySwinger Duo II	CopySwinger Duo III	CopyTray single tray
Action radius (mm):	282 - 376	282 - 376	282 - 376	□
Height (mm):	595	310	405	65
Loading capacity per tray (kg):	3	3	3	3
Height above desk (mm):	148	148	148	148
Number of trays:	5	4	6	1
Weight (kg):	4,7	3,7	4,5	0,6
Mounting:	Universal clamp 1	Universal clamp 1	Universal clamp 1	□
Material*:	P, S	P, S	P, S	P
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	47	47	47	47

## Trays and shelves





Product	BoardMaster 100 / 120 universal clamp 1	BoardMaster 100 / 120 base	Duo BoardMaster 100 / 120 universal clamp 1	Duo-BoardMaster 100 / 120 base	FileMaster 80 / 100 / 120	FileMaster 34
Length (mm):	1000 / 1200	1000 / 1200	1000 / 1200	1000 / 1200	800 / 1000 / 1200	340
Loading capacity (kg):	10	10	10	10	100	6
Height above desk (mm):	148	184	148	184	153	□
Compartment	195	195	195	195	304	304
Weight (kg):	3,6 / 3,8	3,9 / 4,1	5,2 / 6,4	5,7 / 6,4	5,9 / 6,6 / 7,3	2,3
Mounting:	Universal clamp 1	Base	Universal clamp 1	Base	Base	Slot-in
Material*:	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S	A, P, S
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years
Catalogue page:	48	48	48	48	49	49

## TECHNICAL INFORMATION

### Display pocket holders

Product	ViewMaster-Fix	ViewMaster-Ergo II	ViewMaster carousel	ViewMaster desktop carousel
Action radius (mm):	225 - 524	744	331	□
Height above desk (mm):	3-stage 0-190	variable	180	□
Max. number of pockets (each)**:	12	12	40	40
Weight (kg):	1,4	1,7	1,5	2,1
Mounting:	Universal clamp 1	Universal clamp 1	Universal clamp 2	Base
Material*:	P, S	A, P, S	P, S	P, S
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	50	50	51	51





### Accessories



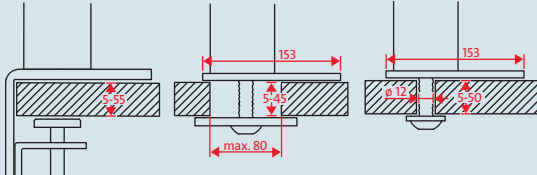
Product	Universal clamp 1	Universal clamp 1 for glass tables	Universal clamp 1 with large clamping length	Universal clamp 2
				
Weight (kg):	0,2	0,3	0,2	0,5
Fixing range (mm):	18 - 74	8 - 64	67 - 121	16 - 76
Material*:	P, S	P, S	P, S	P, S
Warranty:	2 years	2 years	2 years	2 years
Catalogue page:	52	52	52	52

\* Material: A = aluminium, P = plastic, S = steel

■ provided □ not provided

\*\* Not included.

Product	Base (260 mm dia.)	Screw-on plate (plastic)	Screw-on plate (metal)	Drilling screw fitting
				
Weight (kg):	6	0,1	0,3	0,3
Fixing range (mm):	□	Ø 51	Ø 51	10 - 26
Material*:	S	P	S	P, S
Warranty:	2 years	2 years	2 years	2 years
Accessories:	□	□	Handle sleeve with metal thread	□
Catalogue page:	52	53	53	53

Product	Wall bracket (metal)	Wall bracket (plastic)	3 in 1 LiftTEC® desk mount clamp / cable port / drilling screw attachment
			
Weight (kg):	0,4	0,1	1,6
Fixing range (mm):	□	□	5 - 55 / 5 - 45 / 5 - 50
Material*:	A, P	P	A, P
Warranty:	2 years	2 years	2 years
Catalogue page:	53	53	18

Visit us on the Internet at:

**[www.novus.de](http://www.novus.de)**

855-2177 GB 09/10 Technical specifications and design are approximations, subject to change without notice. We accept no liability for printing errors.

**novus®**

MORE.SPACE.SYSTEM.